

Product data sheet

Specifications



LINERGY FM 4P DIS.BLOCK 200A 24M 54HOLES



LVS04014

Main

Range	Linergy
Range Of Product	Linergy
Product Or Component Type	Device feeder
Product Name	Linergy FM
Range Compatibility	PrismaSeT PrismaSeT G enclosure PrismaSeT PrismaSeT P enclosure PrismaSeT Prisma PH enclosure
Product Compatibility	Spacial enclosures
Ip Degree Of Protection	IPxx B

Complementary

Mounting Support	DIN rail Plain backplate Slotted backplate
Installed Device	modular device
Poles Description	3P + N
[Ue] Rated Operational Voltage	690 V AC
[Ui] Rated Insulation Voltage	750 V AC 50/60 Hz
[Uimp] Rated Impulse Withstand Voltage	8 kV
[Ie] Rated Operational Current	200 A
[In] Rated Current	200 A at 40 °C
[Ipk] Rated Peak Withstand Current	30 kA
I ² T On Activation	6700000 A ² .s
Connections - Terminals	Supply: crimped lug50 mm ² Supply: flexible bars, 20 x 3 mm Distribution: quick-connect terminal strips (phase) , 12 x 4...10 mm ² (flexible) Distribution: quick-connect terminal strips (phase) , 12 x 4...10 mm ² (rigid) Distribution: quick-connect terminal strips (neutral) , 18 x 4...10 mm ² (flexible) Distribution: quick-connect terminal strips (neutral) , 18 x 4...10 mm ² (rigid)
9 Mm Pitches	48
Total Number Of 18 Mm Modules	24
Net Weight	1.6 kg
Colour	Anthracite grey (RAL 7016)

Environment

Standards	IEC 61439-1, inside enclosure IEC 61439-2, inside enclosure IEC 60947-7-1
Product Certifications	ASTA

Packing Units

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	7 cm
Package 1 Width	7.8 cm
Package 1 Length	44.5 cm
Package 1 Weight	1.563 kg
Unit Type Of Package 2	CAR
Number Of Units In Package 2	5
Package 2 Height	7 cm
Package 2 Width	38.5 cm
Package 2 Length	44.5 cm
Package 2 Weight	7.838 kg
Unit Type Of Package 3	P06
Number Of Units In Package 3	120
Package 3 Height	95 cm
Package 3 Width	60 cm
Package 3 Length	80 cm
Package 3 Weight	194 kg

Sustainability

Green Premium™ label is Schneider Electric's commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

[Learn more about Green Premium >](#)

[Guide to assess a product's sustainability >](#)



Transparency RoHS/REACH

Well-being performance

✓ Reach Free Of Svhc

✓ Toxic Heavy Metal Free

✓ Mercury Free

✓ Rohs Exemption Information [Yes](#)

✓ Pvc Free

✓ Halogen Free Plastic Parts Product

Certifications & Standards

Reach Regulation

[REACH Declaration](#)

Eu Rohs Directive

Compliant

[EU RoHS Declaration](#)

China Rohs Regulation

[China RoHS declaration](#)

Pro-active China RoHS declaration (out of China RoHS legal scope)

Environmental Disclosure

[Product Environmental Profile](#)


Weee

The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

Circularity Profile

No need of specific recycling operations

Dimensions

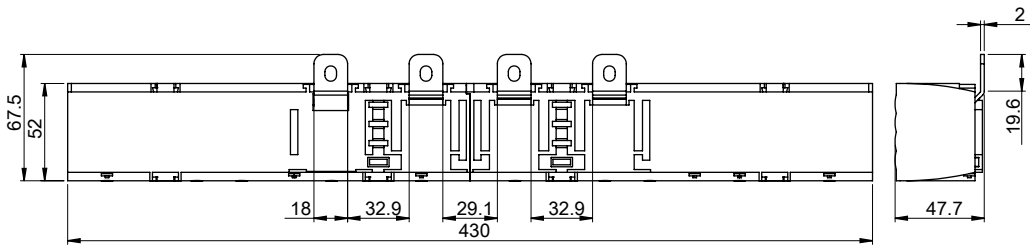

- All dimensions are approximate and are in mm.
- Also see technical documentation.