

# SmartBright Pro Metal Downlight DN069

## SmartBright Pro Metal Downlight DN069 Indoor

### Benefits and features:

- Reliable LED downlight for residential and general lighting applications
- Easy to install and IC-4 rated
- 3 years warranty
- Trailing/leading edge dimmable
- Select from 3 colour temperatures with a slide of the dial
- High efficiency for energy savings

| Application                      | Classification | Warranty |
|----------------------------------|----------------|----------|
| Residential and general lighting | IP 20          | 3 Years  |

### SmartBright Pro Metal Downlight DN069



5 to 40

3000K to 6500K

25000 Hrs

525 to 4000


Watt

CCT

Lifetime

Lumen

Lum. Dimensions (Unit:mm)

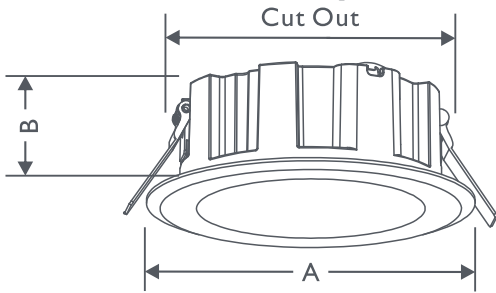

| Type Number               | Lum. Power | Cut Out  | A   | B  |
|---------------------------|------------|----------|-----|----|
| DN069B LED5               | 5W         | D75-80   | 90  | 32 |
| DN069B LED6/DN069B LED7   | 7W         |          |     |    |
| DN069B LED9               | 10W        | D100-110 | 120 | 45 |
| DN069B LED19/DN069B LED21 | 20W        | D140-150 | 166 | 45 |
| DN069B LED28/DN069B LED31 | 30W        |          |     |    |
| DN069B LED36/DN069B LED40 | 40W        |          |     |    |

### Technical Specifications

| نوع المنتج / رمز الصنف<br>Product type / Item Code | القدرة الكهربائية<br>Wattage | شدة الضوء<br>Lumen | الكفاءة<br>Efficacy | تكرار الجهد الكهربائي /<br>Voltage / Frequency (50-60Hz) | الجهد الكهربائي<br>Colour temp. | وضوح اللون<br>CRI | المقاس<br>Dimensions | مقاس القطع<br>Cut out | دخول حماية<br>Ingress Protection | العمر الافتراضي<br>Lifetime | طوارئ<br>Emergency |
|----------------------------------------------------|------------------------------|--------------------|---------------------|----------------------------------------------------------|---------------------------------|-------------------|----------------------|-----------------------|----------------------------------|-----------------------------|--------------------|
|                                                    | W                            | Lm                 | lm/w                | V                                                        | CCT                             |                   | (DxH)mm              | Dia                   | IP                               | hrs.                        | EM                 |
| SLC-DN069B-5W-3K                                   | 5                            | 525                | 105                 | 220-240V                                                 | 3000K                           | 80                | 90x32                | D75-80                | IP20                             | 25000                       | No                 |
| SLC-DN069B-5W-4K                                   | 5                            | 550                | 110                 | 220-240V                                                 | 4000K                           | 80                | 90x32                | D75-80                | IP20                             | 25000                       | No                 |
| SLC-DN069B-5W-6.5K                                 | 5                            | 550                | 110                 | 220-240V                                                 | 6500K                           | 80                | 90x32                | D75-80                | IP20                             | 25000                       | No                 |
| SLC-DN069B-7W-3K                                   | 7                            | 665                | 95                  | 220-240V                                                 | 3000K                           | 80                | 90x32                | D75-80                | IP20                             | 25000                       | No                 |
| SLC-DN069B-7W-4K                                   | 7                            | 700                | 100                 | 220-240V                                                 | 4000K                           | 80                | 90x32                | D75-80                | IP20                             | 25000                       | No                 |
| SLC-DN069B-7W-6.5K                                 | 7                            | 700                | 100                 | 220-240V                                                 | 6500K                           | 80                | 90x32                | D75-80                | IP20                             | 25000                       | No                 |
| SLC-DN069B-10W-3K                                  | 10                           | 900                | 90                  | 220-240V                                                 | 3000K                           | 80                | 120x45               | D100-110              | IP20                             | 25000                       | No                 |
| SLC-DN069B-10W-4K                                  | 10                           | 950                | 95                  | 220-240V                                                 | 4000K                           | 80                | 120x45               | D100-110              | IP20                             | 25000                       | No                 |
| SLC-DN069B-10W-6.5K                                | 10                           | 950                | 95                  | 220-240V                                                 | 6500K                           | 80                | 120x45               | D100-110              | IP20                             | 25000                       | No                 |
| SLC-DN069B-20W-3K                                  | 20                           | 1900               | 95                  | 220-240V                                                 | 3000K                           | 80                | 166x45               | D140-150              | IP20                             | 25000                       | No                 |
| SLC-DN069B-20W-4K                                  | 20                           | 2100               | 105                 | 220-240V                                                 | 4000K                           | 80                | 166x45               | D140-150              | IP20                             | 25000                       | No                 |
| SLC-DN069B-20W-6.5K                                | 20                           | 2100               | 105                 | 220-240V                                                 | 6500K                           | 80                | 166x45               | D140-150              | IP20                             | 25000                       | No                 |
| SLC-DN069B-30W-3K                                  | 30                           | 2850               | 95                  | 220-240V                                                 | 3000K                           | 80                | 225x45               | D190-210              | IP20                             | 25000                       | No                 |
| SLC-DN069B-30W-4K                                  | 30                           | 3150               | 105                 | 220-240V                                                 | 4000K                           | 80                | 225x45               | D190-210              | IP20                             | 25000                       | No                 |
| SLC-DN069B-30W-6.5K                                | 30                           | 3150               | 105                 | 220-240V                                                 | 6500K                           | 80                | 225x45               | D190-210              | IP20                             | 25000                       | No                 |
| SLC-DN069B-40W-3K                                  | 40                           | 3600               | 90                  | 220-240V                                                 | 3000K                           | 80                | 225x45               | D190-210              | IP20                             | 25000                       | No                 |
| SLC-DN069B-40W-4K                                  | 40                           | 4000               | 100                 | 220-240V                                                 | 4000K                           | 80                | 225x45               | D190-210              | IP20                             | 25000                       | No                 |
| SLC-DN069B-40W-6.5K                                | 40                           | 4000               | 100                 | 220-240V                                                 | 6500K                           | 80                | 225x45               | D190-210              | IP20                             | 25000                       | No                 |



DN069 Metal Downlight