


Myers hubs design features

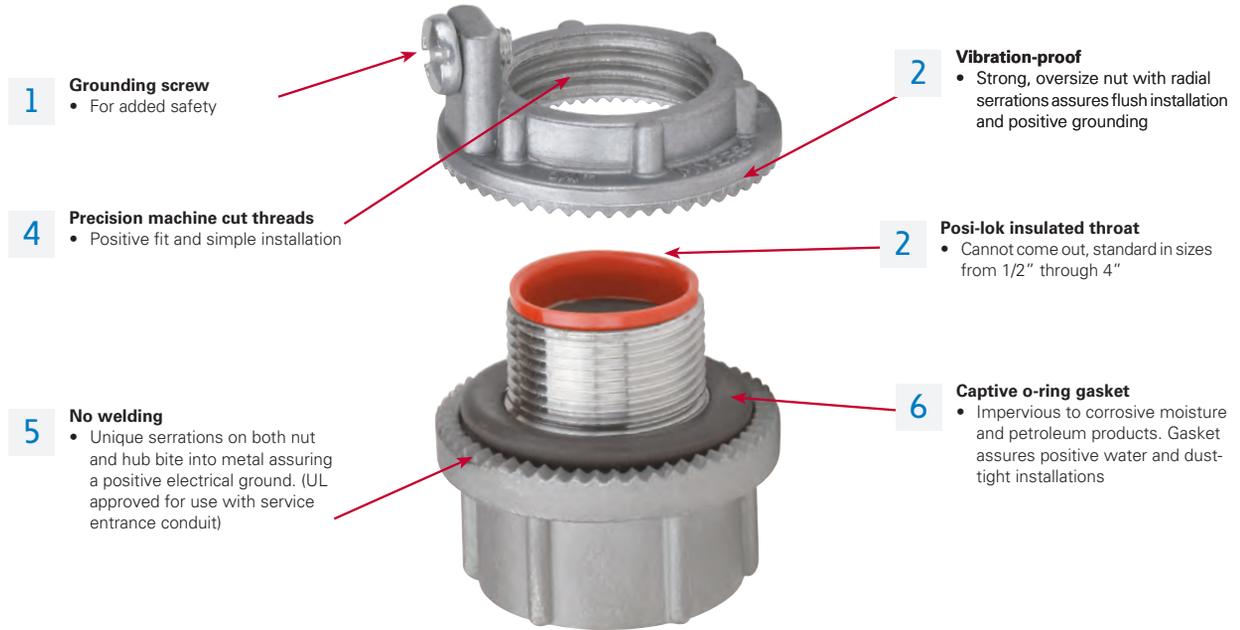

1 **Grounding screw**

- For added safety

2 **Vibration-proof**

- Strong, oversize nut with radial serrations assures flush installation and positive grounding

4 **Precision machine cut threads**

- Positive fit and simple installation

2 **Posi-lok insulated throat**

- Cannot come out, standard in sizes from 1/2" through 4"

5 **No welding**

- Unique serrations on both nut and hub bite into metal assuring a positive electrical ground. (UL approved for use with service entrance conduit)

6 **Captive o-ring gasket**

- Impervious to corrosive moisture and petroleum products. Gasket assures positive water and dust-tight installations



Available in trade sizes 3/8" through 6"

Hub Basic Scru-Tite®

Hubs are ideal for general use with rigid conduit. Provides positive seal and electrical ground.



Available in trade sizes 1/2" through 6"

Ground hub

Combines all of the features of the Hub Basic Scru-Tite® plus the additional feature of the grounding screw on the locknut.



Stainless steel now rated for -55°C to 180°C

Available in trade sizes 1/2" through 4"

ATEX rated hub

Hub is listed for use in hazardous (classified) locations to IECEx-ATEX certifications. Ideal for global requirements and OEM's shipping material worldwide.



Through-bulkhead fitting

Hubs are the perfect method for installing hubs on cast boxes or through thicker walls.



Metric to NPT adapter

Used to convert a threaded metric entry to a NPT entry.



Drain plugs

Designed to install in the bottom of an enclosure to drain any accumulated condensation. Available in aluminum or stainless steel construction.



Cap-off

Designed to install in enclosure to provide environmental cap for unused entries or knockouts.

HUB BASIC SCRU-TITE® – NEMA 2, 3, 3R, 4, 4X, 12

Zinc
UL File No. E-27258



Conduit hubs

Cat. #	Size	Unit qty.	Wt. lbs. per 100
ST 03 [Ⓞ]	3/8"	25	11
ST 1 [Ⓞ]	1/2"	25	19
ST 2 [Ⓞ]	3/4"	25	27
ST 3 [Ⓞ]	1"	25	40
ST 4 [Ⓞ]	1 1/4"	10	51
ST 5 [Ⓞ]	1 1/2"	10	68
ST 6 [Ⓞ]	2"	10	92
ST 7 [Ⓞ]	2 1/2"	5	210
ST 8 [Ⓞ]	3"	2	245
ST 9 [Ⓞ]	3 1/2"	2	278
ST 10 [Ⓞ]	4"	2	318
ST 11 [Ⓞ]	5"	1	478
ST 12 [Ⓞ]	6"	1	685

[Ⓞ]Optional nickel-chrome plate finish. Add suffix -CP.
[Ⓟ]Not supplied with insulator.

HUB BASIC SCRU-TITE® – NEMA 2, 3, 3R, 4, 4X, 12 Aluminum

UL File No. E-27258



Cat. #	Size	Unit qty.	Wt. lbs. per 100
STA 1	1/2"	25	8
STA 2	3/4"	25	11
STA 3	1"	25	17
STA 4	1 1/4"	10	30
STA 5	1 1/2"	10	30
STA 6	2"	10	38
STA 7	2 1/2"	5	80
STA 8	3"	2	100
STA 9	3 1/2"	2	138
STA 10	4"	2	150
STA 11 [Ⓟ]	5"	1	300
STA 12 [Ⓟ]	6"	1	300

[Ⓟ]Not supplied with insulator.

GROUND HUB – NEMA 2, 3, 3R, 4, 4X, 12 316 Stainless steel

UL File No. E-59509



Cat. #	Size	Unit qty.	Wt. lbs. per 100
SSTG 1	1/2"	10	29
SSTG 2	3/4"	10	41
SSTG 3	1"	10	57
SSTG 4	1 1/4"	5	73
SSTG 5	1 1/2"	5	99
SSTG 6	2"	5	134
SSTG 7	2 1/2"	2	183
SSTG 8	3"	2	278
SSTG 9	3 1/2"	2	328
SSTG 10	4"	2	395

GROUND HUB – NEMA 2, 3, 3R, 4, 4X, 12 Zinc

UL File No. E-59509



Cat. #	Size	Unit qty.	Wt. lbs. per 100	Max. Copper Grd. Wire Size	
				CSA [Ⓞ]	UL [Ⓞ]
STG 1	1/2"	25	20	#8	#8
STG 2	3/4"	25	28	#8	#8
STG 3	1"	25	42	#8	#8
STG 4	1 1/4"	10	55	#8	#8
STG 5	1 1/2"	10	70	#6	#8
STG 6	2"	10	95	#4	#8
STG 7	2 1/2"	5	190	#2	#6
STG 8	3"	2	243	1/0	#6
STG 9	3 1/2"	2	300	2/0	#6
STG 10	4"	2	323	2/0	#4
STG 11 [Ⓟ]	5"	1	625	2/0	#2
STG 12 [Ⓟ]	6"	1	750	3/0	#1

[Ⓟ]Not supplied with insulator.
[Ⓞ]Use of wire terminal is required by CSA and recommended by UL for wire gauges over 10 AWG.

GROUND HUB – NEMA 2, 3, 3R, 4, 4X, 12 Aluminum

UL File No. E-59509



Cat. #	Size	Unit qty.	Wt. lbs. per 100	Max. Copper Grd. Wire Size	
				CSA [Ⓞ]	UL [Ⓞ]
STAG 1	1/2"	25	13	#8	#8
STAG 2	3/4"	25	14	#8	#8
STAG 3	1"	25	18	#8	#8
STAG 4	1 1/4"	10	25	#8	#8
STAG 5	1 1/2"	10	33	#6	#8
STAG 6	2"	10	41	#4	#8
STAG 7	2 1/2"	5	90	#2	#6
STAG 8	3"	2	103	1/0	#6
STAG 9	3 1/2"	2	138	2/0	#6
STAG 10	4"	2	140	2/0	#4
STAG 11 [Ⓟ]	5"	1	325	3/0	#2
STAG 12 [Ⓟ]	6"	1	350	3/0	#1

[Ⓟ]Not supplied with insulator.
[Ⓞ]Use of wire terminal is required by CSA and recommended by UL for wire gauges over 10 AWG.