


Product datasheet

Specifications

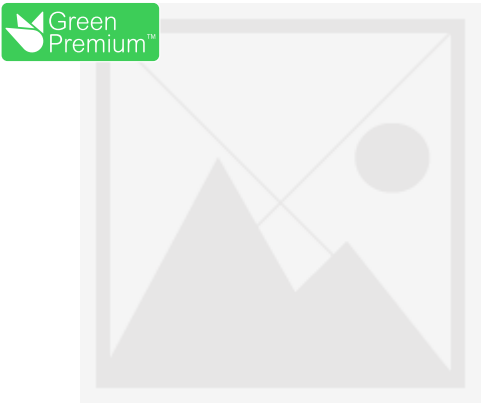

Trip unit TM63D for ComPacT
NSX100/160/250 circuit breakers,
thermal magnetic, rating 63A, 50
degrees C, 3 poles 3D

C103TM063C

Main

Range	ComPacT new generation
Range of product	ComPacT NSX100...250 new generation
Product or component type	Trip unit
Trip unit name	TM-D
Trip unit technology	Thermal-magnetic
Range compatibility	ComPacT new generation NSX100 ComPacT new generation NSX160 ComPacT new generation NSX250
Device application	Distribution
Poles description	3P
Protected poles description	3D
Trip unit protection functions	LI
Protection type	L : for overload protection (thermal) I : for short-circuit protection (magnetic)
Trip unit rating	63 A at 50 °C
[Ue] rated operational voltage	690 V AC 50/60 Hz 750 V DC
Network type	AC DC
Network frequency	50/60 Hz
Circuit breaker mounting mode	Fixed

Complementary

Long-time pick-up adjustment type Ir (thermal protection)	Adjustable
[Ir] long-time protection pick-up adjustment range	0.7...1 x In
Long-time protection delay adjustment type tr	Fixed
[Tr] long-time protection delay adjustment range	120...400 s at 1.5 x In 15 s at 6 x Ir
Instantaneous protection pick-up adjustment type li	Fixed
[li] instantaneous protection pick-up adjustment range	500 A

Earth-leakage protection	Without
--------------------------	---------

Environment

Standards	EN/IEC 60947-2
Electrical shock protection class	Class II
Pollution degree	3 conforming to IEC 60947-1
IP degree of protection	IP40 conforming to IEC 60529
Ambient air temperature for operation	-25...70 °C
Ambient air temperature for storage	-50...85 °C

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	7 cm
Package 1 Width	10 cm
Package 1 Length	11 cm
Package 1 Weight	380 g
Unit Type of Package 2	S03
Number of Units in Package 2	28
Package 2 Height	30 cm
Package 2 Width	30 cm
Package 2 Length	40 cm
Package 2 Weight	11.099 kg
Unit Type of Package 3	P12
Number of Units in Package 3	224
Package 3 Height	70 cm
Package 3 Width	120 cm
Package 3 Length	80 cm
Package 3 Weight	104.092 kg

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	REACH Declaration
EU RoHS Directive	Compliant EU RoHS Declaration
Mercury free	Yes
China RoHS Regulation	China RoHS declaration Product out of China RoHS scope. Substance declaration for your information
RoHS exemption information	Yes
Environmental Disclosure	Product Environmental Profile
Circularity Profile	End of Life Information
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

PVC free

Yes

Recommended replacement(s)