

TECHNICAL DATA SHEET LOW VOLTAGE POWER CABLE

Cable Description:

Cu / XLPE / PVC 1kV 4X240 mm² SM
IEC 60502-1 FR-IEC 60332-1


Design and Construction Data:		
Reference Manufacturing Standards		IEC/BS EN 60228, IEC 60502-1
Max. Permissible Continuous Conductor Temp	°C	90
Max. Conductor Short Circuit Temp for 5 Seconds	°C	250
Rated Voltage 'U ₀ / U'	kV	0.6 / 1.0
Number of Conductors x Cross-Section	mm ²	4 x 240
Conductor Material & Shape		Copper & Stranded Class 2 Compacted Sector Shape
Insulation Material		XLPE
Conductor Nominal Insulation Thickness	mm	1.70
Insulation Color		RED, YELLOW, BLUE, BLACK
Outer Sheath Material		PVC - ST2
Colour of Outer Sheath		BLACK
Approximate Cable Overall Diameter	mm	52.0
Electrical Data:		
Max Conductor DC resistance @ 20 °C	ohms/km	0.0754
Max Conductor AC resistance @ 90 °C	ohms/km	0.0999
Max Conductor Short Circuit Current @ 1 Second	kA	34.32
Current Carry Capacity		
Laid in air @ 40 °C Ambient Temperature		
Free In Air	A	496
In Pipes	A	346
Laid in Ground		
Direct Laid	A	458
Laid In Duct	A	372
Laid in Ground with the following conditions: Ambient Ground Temperature: 35 °C Depth of laying in ground: 0.5 m Soil Thermal Resistivity: 1.2 °K.m/W		
Additional Data:		
Maximum pulling Tension	kN	48.00
Maximum side wall pressure	kN/m	115.4
Minimum Bending Radius	mm	416
The Cable shall meet all Test requirements of:	IEC/BS EN 60228, IEC 60502-1, IEC 60332-1	
Packing Data:		
Drum Type		Non-Returnable
Length of Cable per drum (± 5%)	m	500
Drum Dimensions "Height x Width" (Approx.)	m	2 x 1.19
Gross Weight (Approximate without Lagging)	kg	5,123

**TECHNICAL DATA SHEET
LOW VOLTAGE POWER CABLE**

Cable Marking:

BAHRA CABLES CO. KSA 4 X 240 mm² Cu / XLPE / PVC 600 / 1000 V IEC 60502-1 FR IEC 60332-1
Manufacturing Year - Meter marked

Cable Drawing

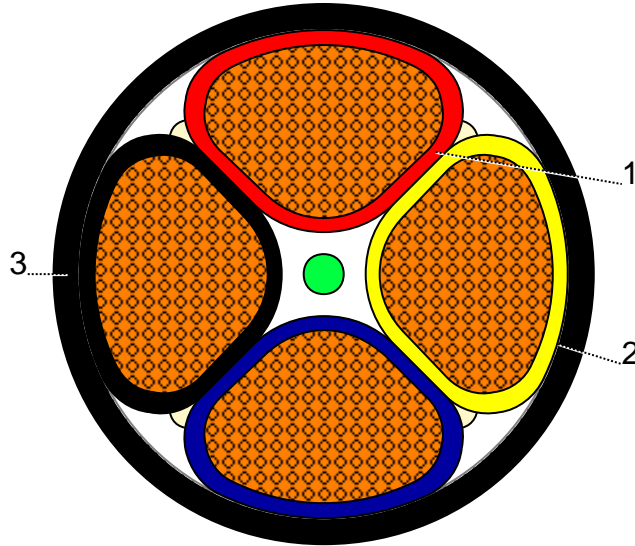

Description	Cu / XLPE / PVC 1kV 4X240 mm ² SM	Approx. Diameter
1	Core	
	Stranded Copper Conductor with sectored shape	24.65 X 17.3
	XLPE insulated	28.05 X 20.7
2	Polymeric Tape	46.83
3	PVC Outer Sheathing	51.98