

TECHNICAL DATA SHEET LOW VOLTAGE POWER CABLE

Cable Description:

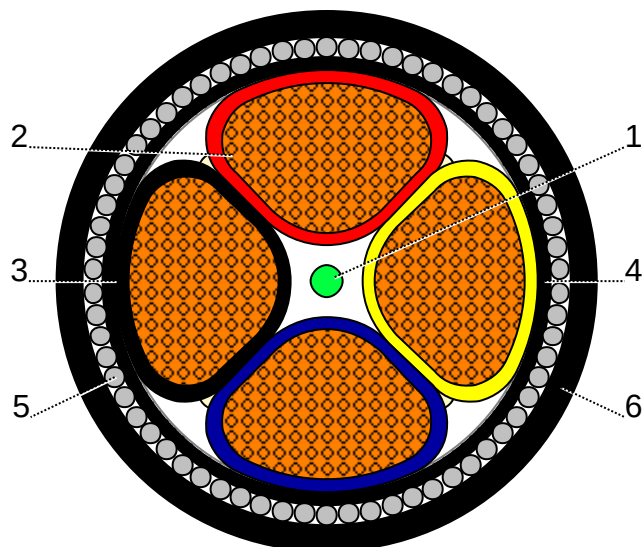
Cu / XLPE / SWA / LS0H 1kV 4X300 mm² SM
IEC 60502-1 FR-IEC 60332-3.24

Design and Construction Data:		
Reference Manufacturing Standards		IEC/BS EN 60228, IEC 60502-1
Max. Permissible Continuous Conductor Temp	°C	90
Max. Conductor Short Circuit Temp for 5 Seconds	°C	250
Rated Voltage ' U ₀ / U '	kV	0.6 / 1.0
Number of Conductors x Cross-Section	mm²	4 x 300
Conductor Material & Shape		Copper & Stranded Class 2 Compacted Sector Shape
Insulation Material		XLPE
Conductor Nominal Insulation Thickness	mm	1.80
Insulation Color		RED, YELLOW, BLUE, BLACK
Armour Material Type		Galvanized Steel Wire
Outer Sheath Material		LS0H - ST8
Colour of Outer Sheath		BLACK
Approximate Cable Overall Diameter	mm	67.6
Electrical Data:		
Max Conductor DC resistance @ 20 °C	ohms/km	0.0601
Max Conductor AC resistance @ 90 °C	ohms/km	0.0813
Max Conductor Short Circuit Current @ 1 Second	kA	42.90
Current Carry Capacity		
Laid in air @ 40 °C Ambient Temperature		
Free In Flat Shap	A	557
Laid in Ground		
Direct Laid In Flat Shape	A	494
Laid in Ground with the following conditions: Ambient Ground Temperature: 35 °C Depth of laying in ground: 0.5 m Soil Thermal Resistivity: 1.2 °K.m/W		
Additional Data:		
Maximum pulling Tension	kN	60.00
Maximum side wall pressure	kN/m	49.3
Minimum Bending Radius	mm	1217
The Cable shall meet all Test requirements of: IEC/BS EN 60228, IEC 60502-1, IEC 60332-3.24		
Packing Data:		
Drum Type		Non-Returnable
Length of Cable per drum (± 5%)	m	300
Drum Dimensions "Height x Width" (Approx.)	m	2 x 1.19
Gross Weight (Approximate without Lagging)	kg	4,841

TECHNICAL DATA SHEET **LOW VOLTAGE POWER CABLE**

Cable Marking:

BAHRA CABLES CO. KSA 4 X 300 mm² Cu / XLPE / SWA / LS0H 600 / 1000 V IEC 60502-1 IEC61034 IEC60754-1&2
FR IEC 60332-3.24 Manufacturing Year - Meter marked

Cable Drawing


Description	Cu / XLPE / SWA / LS0H 1kV 4X300 mm ² SM	Approx. Diameter
1	Non-Hygroscopic Filler	-
2	Core	
	Stranded Copper Conductor with sector shape	27.57 X 19.35
	XLPE insulated	31.17 X 22.95
3	Polymeric Tape	53.22
4	LS0H Compound	56.11
5	Galvanized Steel Wire Armour (SWA)	60.91
6	LS0H Outer Sheathing	67.61