


# Product datasheet

Specifications



## Mounting plate, PrismaSeT G, for NSX/CVS/Vigi/INS 250A, horizontal fixed, toggle, 10M, W600mm



LVS03040

### Main

<b>Range</b>	PrismaSeT
<b>Range Of Product</b>	PrismaSeT G
<b>Product Or Component Type</b>	Mounting plate
<b>Accessory / Separate Part Category</b>	Installation accessory
<b>Range Compatibility</b>	PrismaSeT PrismaSeT G enclosure
<b>Installation Description</b>	Floor-standing enclosure - width 600 mm Wall-mounted enclosure - width 600 mm
<b>Installed Device</b>	EasyPact: fixed CVS100...160 without earth leakage protection - control: toggle - vertical installation EasyPact: fixed CVS250 without earth leakage protection - control: toggle - vertical installation ComPact: fixed INS250 - control: direct front rotary handle - vertical installation ComPact: fixed INV100 - control: direct front rotary handle - vertical installation ComPact: fixed INV160 - control: direct front rotary handle - vertical installation ComPact: fixed INV200 - control: direct front rotary handle - vertical installation ComPact: fixed INV250 - control: direct front rotary handle - vertical installation ComPact: fixed NSX100...160 without earth leakage protection - control: toggle - vertical installation ComPact: fixed NSX250 without earth leakage protection - control: toggle - vertical installation EasyPact: fixed CVS100...160 with earth leakage protection - control: toggle - vertical installation EasyPact: fixed CVS250 with earth leakage protection - control: toggle - vertical installation ComPact: fixed NSX100...160 with earth leakage protection - control: toggle - vertical installation ComPact: fixed NSX250 with earth leakage protection - control: toggle - vertical installation
<b>Poles Description</b>	1 x 3P: fixed INS250 vertical installation 1 x 4P: fixed INS250 vertical installation 1 x 3P: fixed INV250 vertical installation 1 x 4P: fixed INV250 vertical installation 4 x 3P: fixed CVS100...160 vertical installation 3 x 4P: fixed CVS100...160 vertical installation 4 x 3P: fixed CVS250 vertical installation 3 x 4P: fixed CVS250 vertical installation 1 x 3P: fixed INV100 vertical installation 1 x 4P: fixed INV100 vertical installation 1 x 3P: fixed INV160 vertical installation 1 x 4P: fixed INV160 vertical installation 1 x 3P: fixed INV200 vertical installation 1 x 4P: fixed INV200 vertical installation 4 x 3P: fixed NSX100...160 vertical installation 3 x 4P: fixed NSX100...160 vertical installation 4 x 3P: fixed NSX250 vertical installation 3 x 4P: fixed NSX250 vertical installation
<b>Condition Of Using Cable Tie</b>	Need additional plate (1M high) when installation of device is in vertical

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

<b>Number Of Vertical Modules [50 Mm]</b>	<p>8 module(s): INS250, direct with long terminal shield in 600 mm Widefloor-standing enclosure (cable coming from top or bottom of enclosure)</p> <p>8 module(s): INS250, direct with long terminal shield in 600 mm Widewall-mounted enclosure (cable coming from top or bottom of enclosure)</p> <p>8 module(s): INV250, direct with long terminal shield in 600 mm Widefloor-standing enclosure (cable coming from top or bottom of enclosure)</p> <p>8 module(s): INV250, direct with long terminal shield in 600 mm Widewall-mounted enclosure (cable coming from top or bottom of enclosure)</p> <p>9 module(s): CVS100...160 without earth leakage protection , direct with long terminal shield in 600 mm Widefloor-standing enclosure (cable coming from top or bottom of enclosure)</p> <p>9 module(s): CVS100...160 without earth leakage protection , direct with long terminal shield in 600 mm Widewall-mounted enclosure (cable coming from top or bottom of enclosure)</p> <p>11 module(s): CVS250 without earth leakage protection , direct with long terminal shield in 600 mm Widefloor-standing enclosure (cable coming from top or bottom of enclosure)</p> <p>11 module(s): CVS250 without earth leakage protection , direct with long terminal shield in 600 mm Widewall-mounted enclosure (cable coming from top or bottom of enclosure)</p> <p>8 module(s): INV100, direct with long terminal shield in 600 mm Widefloor-standing enclosure (cable coming from top or bottom of enclosure)</p> <p>8 module(s): INV100, direct with long terminal shield in 600 mm Widewall-mounted enclosure (cable coming from top or bottom of enclosure)</p> <p>8 module(s): INV160, direct with long terminal shield in 600 mm Widefloor-standing enclosure (cable coming from top or bottom of enclosure)</p> <p>8 module(s): INV160, direct with long terminal shield in 600 mm Widewall-mounted enclosure (cable coming from top or bottom of enclosure)</p> <p>8 module(s): INV200, direct with long terminal shield in 600 mm Widefloor-standing enclosure (cable coming from top or bottom of enclosure)</p> <p>8 module(s): INV200, direct with long terminal shield in 600 mm Widewall-mounted enclosure (cable coming from top or bottom of enclosure)</p> <p>9 module(s): NSX100...160 without earth leakage protection , direct with long terminal shield in 600 mm Widefloor-standing enclosure (cable coming from top or bottom of enclosure)</p> <p>9 module(s): NSX100...160 without earth leakage protection , direct with long terminal shield in 600 mm Widewall-mounted enclosure (cable coming from top or bottom of enclosure)</p> <p>11 module(s): NSX250 without earth leakage protection , direct with long terminal shield in 600 mm Widefloor-standing enclosure (cable coming from top or bottom of enclosure)</p> <p>11 module(s): NSX250 without earth leakage protection , direct with long terminal shield in 600 mm Widewall-mounted enclosure (cable coming from top or bottom of enclosure)</p> <p>10 module(s): CVS100...160 with earth leakage protection , direct with long terminal shield in 600 mm Widefloor-standing enclosure (cable coming from top or bottom of enclosure)</p> <p>10 module(s): CVS100...160 with earth leakage protection , direct with long terminal shield in 600 mm Widewall-mounted enclosure (cable coming from top or bottom of enclosure)</p> <p>13 module(s): CVS250 with earth leakage protection , direct with long terminal shield in 600 mm Widefloor-standing enclosure (cable coming from top or bottom of enclosure)</p> <p>13 module(s): CVS250 with earth leakage protection , direct with long terminal shield in 600 mm Widewall-mounted enclosure (cable coming from top or bottom of enclosure)</p> <p>10 module(s): NSX100...160 with earth leakage protection , direct with long terminal shield in 600 mm Widefloor-standing enclosure (cable coming from top or bottom of enclosure)</p> <p>10 module(s): NSX100...160 with earth leakage protection , direct with long terminal shield in 600 mm Widewall-mounted enclosure (cable coming from top or bottom of enclosure)</p> <p>13 module(s): NSX250 with earth leakage protection , direct with long terminal shield in 600 mm Widefloor-standing enclosure (cable coming from top or bottom of enclosure)</p> <p>13 module(s): NSX250 with earth leakage protection , direct with long terminal shield in 600 mm Widewall-mounted enclosure (cable coming from top or bottom of enclosure)</p>
<b>Standards</b>	IEC 61439-2
<b>Product Certifications</b>	ASTA

## Complementary

<b>Cable Entry</b>	<p>Cut-out plates 0.36 mm top or bottom 167 mm</p> <p>Cut-out plates 0.31 mm top or bottom 267 mm</p> <p>Cut-out plates 0.34 mm top or bottom 117 mm</p>
--------------------	--

<b>Material</b>	Sheet steel
<b>Protective Treatment</b>	Electrophoresis treatment and hot-polymerised polyester epoxy powder
<b>Surface Finish</b>	Matt Textured
<b>Colour</b>	White (RAL 9003)
<b>Width</b>	600 mm
<b>Height</b>	150 mm
<b>Net Weight</b>	0.915 kg



---

600 mm PrismaSeT G floor-standing enclosure EasyPact CVS250 with fixed toggle vertical 3P 4 direct with long terminal shield 13 0.31 mm  
600 mm PrismaSeT G wall-mounted enclosure EasyPact CVS250 with fixed toggle vertical 3P 4 direct with long terminal shield 13 0.31 mm  
600 mm PrismaSeT G floor-standing enclosure EasyPact CVS250 with fixed toggle vertical 4P 3 direct with long terminal shield 13 0.31 mm  
600 mm PrismaSeT G wall-mounted enclosure EasyPact CVS250 with fixed toggle vertical 4P 3 direct with long terminal shield 13 0.31 mm  
600 mm PrismaSeT G floor-standing enclosure ComPact NSX100...160 with fixed toggle vertical 3P 4 direct with long terminal shield 10 0.36 mm  
600 mm PrismaSeT G wall-mounted enclosure ComPact NSX100...160 with fixed toggle vertical 3P 4 direct with long terminal shield 10 0.36 mm  
600 mm PrismaSeT G floor-standing enclosure ComPact NSX100...160 with fixed toggle vertical 4P 3 direct with long terminal shield 10 0.36 mm  
600 mm PrismaSeT G wall-mounted enclosure ComPact NSX100...160 with fixed toggle vertical 4P 3 direct with long terminal shield 10 0.36 mm  
600 mm PrismaSeT G floor-standing enclosure ComPact NSX250 with fixed toggle vertical 3P 4 direct with long terminal shield 13 0.31 mm  
600 mm PrismaSeT G wall-mounted enclosure ComPact NSX250 with fixed toggle vertical 3P 4 direct with long terminal shield 13 0.31 mm  
600 mm PrismaSeT G floor-standing enclosure ComPact NSX250 with fixed toggle vertical 4P 3 direct with long terminal shield 13 0.31 mm  
600 mm PrismaSeT G wall-mounted enclosure ComPact NSX250 with fixed toggle vertical 4P 3 direct with long terminal shield 13 0.31 mm

## Packing Units

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	5.8 cm
Package 1 Width	15.2 cm
Package 1 Length	47 cm
Package 1 Weight	1.008 kg
Unit Type Of Package 2	S04
Number Of Units In Package 2	10
Package 2 Height	30 cm
Package 2 Width	40 cm
Package 2 Length	60 cm
Package 2 Weight	10.855 kg

## Sustainability

**Green Premium™ label** is Schneider Electric's commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO<sub>2</sub> products.

**Guide to assessing product sustainability** is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

[Learn more about Green Premium >](#)

[Guide to assess a product's sustainability >](#)



Transparency RoHS/REACH

## Well-being performance

✓ Reach Free Of Svhc

✓ Toxic Heavy Metal Free

✓ Mercury Free

✓ Rohs Exemption Information [Yes](#)

✓ Pvc Free

✓ Halogen Free Plastic Parts Product

## Certifications & Standards

**Reach Regulation**

[REACH Declaration](#)

**Eu Rohs Directive**

Pro-active compliance (Product out of EU RoHS legal scope)

[EU RoHS Declaration](#)

**China Rohs Regulation**

[China RoHS declaration](#)

Pro-active China RoHS declaration (out of China RoHS legal scope)

**Environmental Disclosure**


[Product Environmental Profile](#)

**Circularity Profile**

No need of specific recycling operations

Dimensions

---

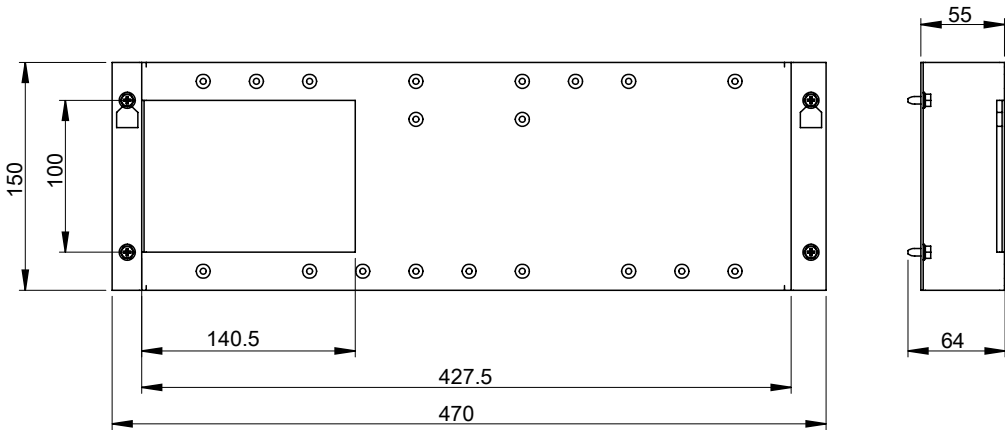

- All dimensions are approximate and are in mm.
- Also see technical documentation.