


Product datasheet

Specifications



Mounting plate, PrismaSeT P, for NS 1600A 3P/4P, vertical fixed, 37M, W400mm

LVS03487

Main

Range	PrismaSeT
Range Of Product	PrismaSeT P
Product Or Component Type	Mounting plate
Accessory / Separate Part Category	Installation accessory
Range Compatibility	PrismaSeT PrismaSeT P cubicle
Installation Description	Cubicle - width 400 mm depth 400 mm
Installed Device	ComPact: fixed NSX400 without earth leakage protection - control: toggle - vertical installation ComPact: fixed NSX630 without earth leakage protection - control: toggle - vertical installation ComPact: fixed NSX400 with earth leakage protection - control: toggle - vertical installation ComPact: fixed NSX630 with earth leakage protection - control: toggle - vertical installation ComPact: fixed NSX400 without earth leakage protection - control: direct front rotary handle - vertical installation ComPact: fixed NSX630 without earth leakage protection - control: direct front rotary handle - vertical installation ComPact: plug-in NSX400 without earth leakage protection - control: toggle - vertical installation ComPact: fixed NSX400 without earth leakage protection - control: motor mechanism - vertical installation ComPact: plug-in NSX400 without earth leakage protection - control: direct front rotary handle - vertical installation ComPact: plug-in NSX400 without earth leakage protection - control: motor mechanism - vertical installation ComPact: plug-in NSX630 without earth leakage protection - control: toggle - vertical installation ComPact: fixed NSX630 without earth leakage protection - control: motor mechanism - vertical installation ComPact: plug-in NSX630 without earth leakage protection - control: direct front rotary handle - vertical installation ComPact: plug-in NSX630 without earth leakage protection - control: motor mechanism - vertical installation ComPact: plug-in NSX400 with earth leakage protection - control: toggle - vertical installation ComPact: plug-in NSX630 with earth leakage protection - control: toggle - vertical installation ComPact: fixed NS1250 - control: toggle - vertical installation ComPact: fixed NS1250 - control: direct front rotary handle - vertical installation ComPact: fixed NS1250 - control: motor mechanism - vertical installation ComPact: fixed NS1600 - control: toggle - vertical installation ComPact: fixed NS1600 - control: direct front rotary handle - vertical installation ComPact: fixed NS1600 - control: motor mechanism - vertical installation ComPact: fixed NS630b...1000 - control: toggle - vertical installation ComPact: fixed NS630b...1000 - control: direct front rotary handle - vertical installation ComPact: fixed NS630b...1000 - control: motor mechanism - vertical installation

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Poles Description	1 x 3P: fixed NSX400 vertical installation 1 x 4P: fixed NSX400 vertical installation 1 x 3P: fixed NSX630 vertical installation 1 x 4P: fixed NSX630 vertical installation 1 x 3P: plug-in NSX400 vertical installation 1 x 4P: plug-in NSX400 vertical installation 1 x 3P: plug-in NSX630 vertical installation 1 x 4P: plug-in NSX630 vertical installation 1 x 3P: fixed NS1250 vertical installation 1 x 4P: fixed NS1250 vertical installation 1 x 3P: fixed NS1600 vertical installation 1 x 4P: fixed NS1600 vertical installation 1 x 3P: fixed NS630b...1000 vertical installation 1 x 4P: fixed NS630b...1000 vertical installation
Number Of Vertical Modules [50 Mm]	36 module(s): NS1250, direct in 400 mm Widecubicle 36 module(s): NS1600, direct in 400 mm Widecubicle 36 module(s): NS630b...1000, direct in 400 mm Widecubicle 12 module(s): NSX400 without earth leakage protection , front connection in 400 mm Widecubicle 12 module(s): NSX630 without earth leakage protection , front connection in 400 mm Widecubicle 14 module(s): NSX400 with earth leakage protection , front connection in 400 mm Widecubicle 14 module(s): NSX630 with earth leakage protection , front connection in 400 mm Widecubicle
Standards	IEC 61439-2
Product Certifications	ASTA

Complementary

Material	Sheet steel
Protective Treatment	Electrophoresis treatment and hot-polymerised polyester epoxy powder
Surface Finish	Matt Textured
Colour	White (RAL 9003)
Width	400 mm
Height	300 mm
Net Weight	2.7 kg

400 mm 400 mm PrismaSeT P cubicle ComPact NSX630 without plug-in motor
mechanism vertical 3P 1 front connection 12 137.5 mm

400 mm 400 mm PrismaSeT P cubicle ComPact NSX630 without plug-in motor
mechanism vertical 4P 1 front connection 12 137.5 mm

400 mm 400 mm PrismaSeT P cubicle ComPact NSX400 with fixed toggle vertical
3P 1 front connection 14 112.5 mm

400 mm 400 mm PrismaSeT P cubicle ComPact NSX400 with fixed toggle vertical
4P 1 front connection 14 112.5 mm

400 mm 400 mm PrismaSeT P cubicle ComPact NSX400 with plug-in toggle vertical
3P 1 front connection 14 112.5 mm

400 mm 400 mm PrismaSeT P cubicle ComPact NSX400 with plug-in toggle vertical
4P 1 front connection 14 112.5 mm

400 mm 400 mm PrismaSeT P cubicle ComPact NSX630 with fixed toggle vertical
3P 1 front connection 14 112.5 mm

400 mm 400 mm PrismaSeT P cubicle ComPact NSX630 with fixed toggle vertical
4P 1 front connection 14 112.5 mm

400 mm 400 mm PrismaSeT P cubicle ComPact NSX630 with plug-in toggle vertical
3P 1 front connection 14 112.5 mm

400 mm 400 mm PrismaSeT P cubicle ComPact NSX630 with plug-in toggle vertical
4P 1 front connection 14 112.5 mm

Packing Units

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	4.000 cm
Package 1 Width	31.000 cm
Package 1 Length	37.500 cm
Package 1 Weight	2.878 kg
Unit Type Of Package 2	S04
Number Of Units In Package 2	4
Package 2 Height	30.000 cm
Package 2 Width	40.000 cm
Package 2 Length	60.000 cm
Package 2 Weight	12.600 kg
Unit Type Of Package 3	P12
Number Of Units In Package 3	96
Package 3 Height	105.000 cm
Package 3 Width	80.000 cm
Package 3 Length	120.000 cm
Package 3 Weight	319.000 kg

Sustainability

Green Premium™ label is Schneider Electric’s commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

[Learn more about Green Premium >](#)

[Guide to assess a product’s sustainability >](#)



Transparency RoHS/REACH


Well-being performance

✓ Toxic Heavy Metal Free	
✓ Mercury Free	
✓ Rohs Exemption Information	Yes
✓ Pvc Free	
✓ Halogen Free Plastic Parts Product	

Certifications & Standards

Reach Regulation	REACH Declaration
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
China Rohs Regulation	China RoHS declaration Pro-active China RoHS declaration (out of China RoHS legal scope)
Environmental Disclosure	Product Environmental Profile
Circularity Profile	No need of specific recycling operations

Dimensions

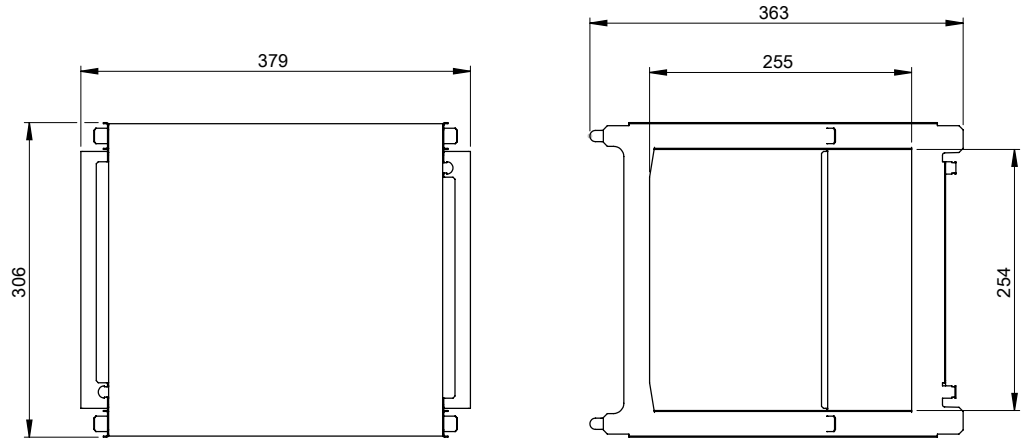

- All dimensions are approximate and are in mm.
- Also see technical documentation.