



# Galion™ 13A Double Pole Switched Sockets



2 824 86



2 824 87

## 1. USE

One and two gang switched and unswitched 13A DP socket outlets designed to accept BS 1363 fused plugs.  
 (Supplied with M3.5 screws for Flush mounting or surface mounting 35mm deep BS boxes.)


## 2. RANGE

Designation	Cat. No.
1G BS 13A Double Pole switched socket	2 824 86
2G BS 13A Double Pole switched socket	2 824 87

### Colours

- front: white/rose golden/champagne/dark silver  
 - rear: white/rose golden/champagne/dark silver  
 X XXX XX white  
 X XXX XX-C matt black  
 X XXX XX-C1 rose golden  
 X XXX XX-C2 champagne  
 X XXX XX-C3 dark silver

## 3. DIMENSIONS

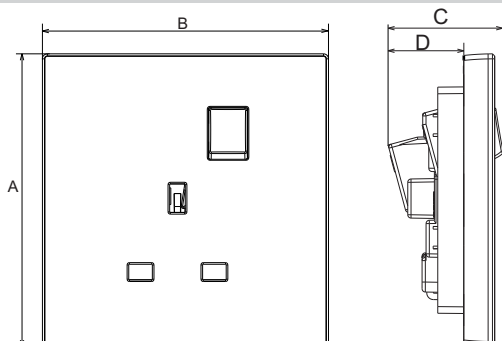

References	A	B	C	D
2 824 86	88	86	34.6	22.8
2 824 87	88	86	30.2	18.7

Minimum depth of the box > 35 mm

## 4. CONNECTION

### 4.1 Terminals

Terminal capacity: 3 × 1 mm<sup>2</sup>  
 3 × 1.5 mm<sup>2</sup>  
 2 × 2.5 mm<sup>2</sup>  
 1 × 4 mm<sup>2</sup>

Recommended screwdriver size: 4 mm flat blade  
 Recommended stripping length: 12 mm  
 Recommended terminal tightening torque: 0.5Nm

## 5. TECHNICAL CHARACTERISTICS

### 5.1 Material characteristics

Rocker: Polycarbonate  
 Bar: Polycarbonate  
 Frame: Polycarbonate  
 Base: Polyamide  
 Self-extinguishing:  
 + 850° C / 30 s for insulating parts holding live parts in place  
 + 650° C / 30 s for other parts made of insulating materials

### 5.2 Electrical characteristics

Voltage: 250V~  
 Current: 13A

### 5.4 Climatic characteristics

Storage temperatures: -10°C to +70°C  
 Operating temperatures: -5°C to +50°C

### 5.5 Mechanical characteristics

Impact test: IK04  
 Protection against liquids: IP20

## 6. CLEANING

Surface cleaning with a soft, slightly damp cloth.  
 Do not use: acetone, tar remover, trichloroethylene

## 7. CONFORMITY - APPROVALS

Conform to BS 1363-2; SS 145-2; MS 589-2.