



# Arteor™ Lighting controls 10 AX


Cat. No(s): 5 700 04/05/34/35/62/63/64/65/66/67  
 5 710 04/05/34/35/62/63/64/65/66/67 - 5 720 04/05/34/35 - 5 725 04/05/34/35  
 5 730 10/11/12/13/14/15/60/61 - 5 731 10/11/12/13/14/15/60/61



5 700 04 - 5 710 04  
 5 720 04 - 5 725 04



5 700 34 - 5 710 34  
 5 720 34 - 5 725 34



5 700 66 - 5 710 66  
 5 730 60 - 5 731 61


## 1. USE

Lighting controls mechanisms.  
 Mechanisms supplied with rocker plates.  
 To be equipped with support frames and plates.  
 Flush-mounting or surface-mounting.

## 2. RANGE

Designation	White	Magnesium	Soft Alu	Champagne
1-way switch (square) - 1 module	5 720 04	5 725 04	5 710 04	5 700 04
2-way switch (square) - 1 module	5 720 05	5 725 05	5 710 05	5 700 05
1-way switch (square) - 2 modules	5 720 34	5 725 34	5 710 34	5 700 34
2-way switch (square) - 2 modules	5 720 35	5 725 35	5 710 35	5 700 35
1-way switch (round left) - 1 module	5 730 10	5 731 10	5 710 62	5 700 62
1-way switch (middle) - 1 module	5 730 11	5 731 11	-	-
1-way switch (round right) - 1 module	5 730 12	5 731 12	5 710 63	5 700 63
2-way switch (round left) - 1 module	5 730 13	5 731 13	5 710 64	5 700 64
2-way switch (middle) - 1 module	5 730 14	5 731 14	-	-
2-way switch (round right) - 1 module	5 730 15	5 731 15	5 710 65	5 700 65
1-way switch (round) - 2 modules	5 730 60	5 731 60	5 710 66	5 700 66
2-way switch (round) - 2 modules	5 730 61	5 731 61	5 710 67	5 700 67

## 3. OVERALL DIMENSIONS (mm)

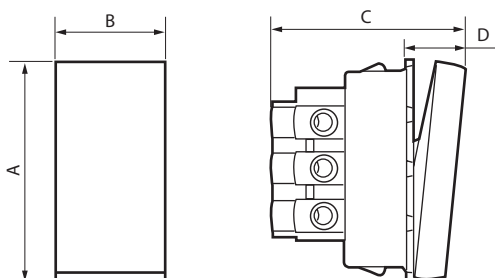

	A	B	C	D
1 module	45	22.5	42	13
2 modules	45	45	42	13

#### 4. CONNECTION

Terminals: with screws  
Capacity: 2 x 2.5 mm<sup>2</sup> or 1 x 4 mm<sup>2</sup>  
Stripping length: 10 mm  
Screwdriver: 4 mm flat-blade up to 5.5 mm

#### 5. TECHNICAL CHARACTERISTICS

##### ■ 5.1 Mechanical characteristics

Protection against solid bodies and liquids: IP 20 (alone)  
IP 40 (mounted)

Protection against impact: IK 04

##### ■ 5.2 Material characteristics

Material: Rocker: PC  
Mechanism casing: PC  
Basket: PP

Halogen-free  
UV-resistant

Self-extinguishing:

850°C/30 s for insulating parts holding live parts in place  
650°C/30 s for other insulating components

##### ■ 5.3 Electrical characteristics

Voltage: 250 V~  
Current: 10 AX  
Max. power for self-ballasted lamps: 100 W  
Frequency: 50/60Hz

##### ■ 5.4 Climate characteristics

Storage temperature: - 10°C to + 70°C  
Usage temperature: - 5°C to + 50°C

#### 6. MAINTENANCE

Surface cleaning with a cloth.  
Do not use: acetone, tar remover, trichloroethylene.  
Resistance to cleaning products: Hexane (EN 60669-1), Methylated spirit, Soapy water, Diluted ammonia, Pure bleach diluted to 10%, Window-cleaning products, Pre-impregnated wipes.

**Caution:** Always test before using other special cleaning products.

#### 7. STANDARDS AND APPROVALS

Compliant with installation and manufacturing standards.  
See e. catalogue.