



Arteor™ Painted pearl alu plates US standard


Cat. No(s): 5 752 41/51/61/71/81/91
5 753 01/21
5 756 31/41/51/61/71 - 5 767 21



5 752 41



5 752 71












5 753 01






1. USE

Plates for covering mechanisms.

2. RANGE

	Designation	Cat. No.	No of modules	Fixing method	Weight (g)
	1 module plate square (2'' x 4'')	5 752 41	1	with clips	41.5
	1 module plate vertical square (2'' x 4'')	5 767 21	1	with clips	45.1
	2 modules plate square (2'' x 4'')	5 752 51	2	with clips	40.9
	2 modules plate square (4'' x 4'')	5 752 61	2	with clips	57
	2 modules plate round (2'' x 4'')	5 756 31	2	with clips	42.2
	2 modules plate round (4'' x 4'')	5 756 41	2	with clips	58.2
	3 modules plate square (2'' x 4'')	5 752 71	3	with clips	36.1
	3 modules plate square (4'' x 4'')	5 752 81	3	with clips	53.7
	3 modules plate round (2'' x 4'')	5 756 51	3	with clips	38.2


2. RANGE (continued)

	Designation	Cat. No.	No of modules	Fixing method	Weight (g)
	3 modules plate round (4'' x 4'')	5 756 61	3	with clips	53.5
	4 modules plate square (4'' x 4'')	5 752 91	4	with clips	49
	2 x 3 modules plate square (4'' x 4'')	5 753 01	2 x 3	with clips	44
	2 x 3 modules plate round (4'' x 4'')	5 756 71	2 x 3	with clips	47.8
	Plate for 4 modules socket	5 753 21	4	with clips	32.6

Arteor™ Painted pearl alu plates US standard

Cat. No(s): 5 752 41/51/61/71/81/91
5 753 01/21
5 756 31/41/51/61/71 - 5 767 21

3. OVERALL DIMENSIONS

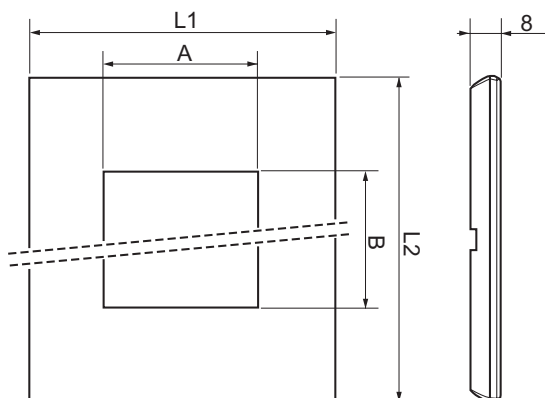

4. MOUNTING

The plates clip on in notches onto screw-type or claw-type mounting supports (notches are used for thickness compensation. E.g: wall paper). Easy to remove with a screwdriver.
No flatness defect of more than 1.5 mm in a periphery of 10 cm around the installed flush box.
Protection film must be removed only once site work is fully completed.

5. TECHNICAL CHARACTERISTICS

5.1 Mechanical characteristics

Impact tests : IK 04

5.2 Material characteristics

Front plate: polycarbonate
Under plate: polycarbonate

5.3 Climatic characteristics

Storage temperatures: - 10° C to + 70° C
Operating temperatures: - 5° C to + 50° C

6. CLEANING

Surface cleaning with a cloth.
Do not use: acetone, tar remover, trichloroethylene.

6.1 Resistance to cleaning agents

Hexane (EN 60669-1), methylated spirits, soapy water, glass cleaning substance.

6.2 Resistance to hospital-type cleaning agents

Resistance to the following agents: Anios, Surfarios, Bactily sine, Hydrogen peroxyde (30%).

7. SPECIAL USE

Arteor plates must not be painted.

Cat. No.	L1	L2	A	B
5 752 41	92	127	45.4	22.8
5 752 51				45.4
5 752 61	68			
5 752 71	92		90.8	45.4
5 752 81	127			
5 752 91	127		2 x 45.4	2 x 68
5 753 01			45.4	90.8
5 753 21	92		Ø 45.4	
5 756 31	127		45.4	68
5 756 41	92			
5 756 51	127		2 x 45.4	2 x 68
5 756 61			22.8	15
5 756 71	92			
5 767 21				