



Mallia™ Senses with Netatmo Connected ON/OFF wireless controls for lighting and socket outlets


Cat. Nos: 2 815 12DS/MB/MW - 2 815 13DS/MB/MW
 2 815 14DS/MB/MW

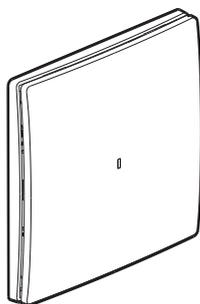

2 815 12DS/MB/MW

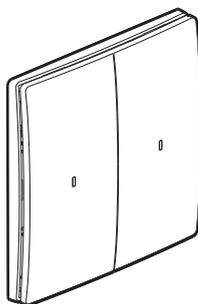

2 815 13DS/MB/MW

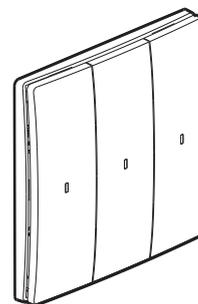

2 815 14DS/MB/MW

1. USE

Wireless controls for ON/OFF/dimming light functions or connected socket outlets.

This product controls "with Netatmo" micromodule products, connected socket outlets, connected switches and dimmers.

Can be used as a two-way switch or to control a lighting group.

- Fixes directly on the wall or screws onto a flush-mounting box. Multi-gang version can be combined with other wiring accessories.
- Fits on furniture (movable).

1-gang can be combined with 20 wired products.


2-gang can be combined with 2 x 20 wired products.

3-gang can be combined with 3 x 20 wired products.

2. RANGE

Description	Silver	Black	White
Wireless lighting and socket outlets controls, for an ON/OFF/dimming, centralisation function. Complete delivered with a battery and protection film. Equipped with an LED indicator (configuration) and a RESET button (hidden) used to return to factory settings. Supplied with repositionable self-adhesive fixings.	2 815 12DS 1-gang	2 815 12MB 1-gang	2 815 12MW 1-gang
	2 815 13DS 2-gang	2 815 13MB 2-gang	2 815 13MW 2-gang
	2 815 14DS 3-gang	2 815 14MB 3-gang	2 815 14MW 3-gang


3. DIMENSIONS (mm)

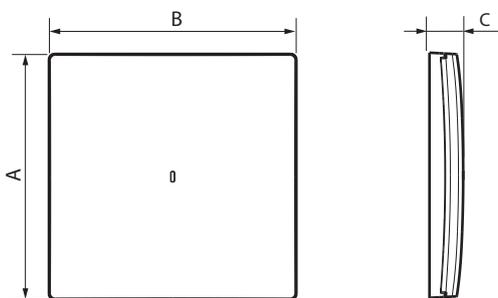

A	B	C
86	86	12



4. OPERATION

1-gang: 2 815 12DS/MB/MW


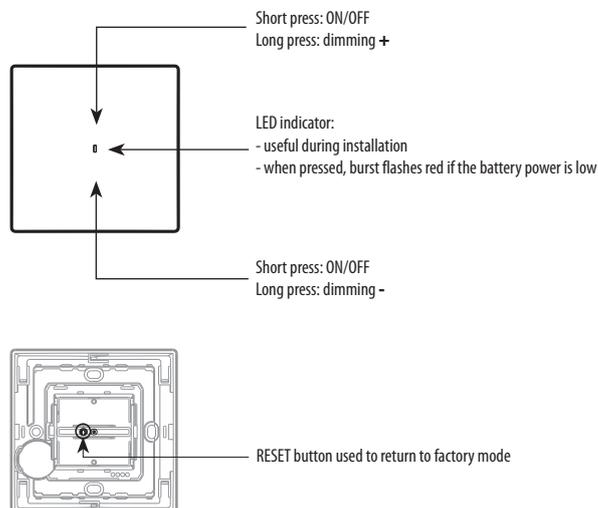


4. OPERATION (continued)

2-gang: 2 815 13DS/MB/MW

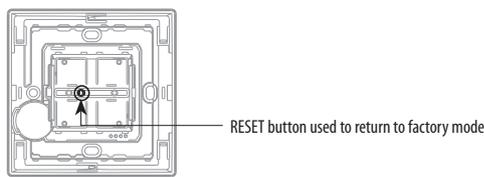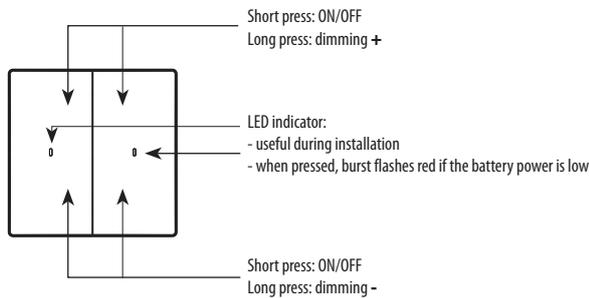

3-gang: 2 815 14DS/MB/MW

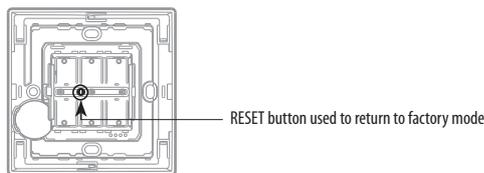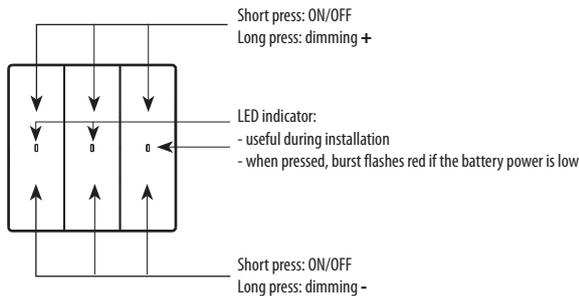

5. TECHNICAL CHARACTERISTICS

■ **5.1 Mechanical characteristics**

Protection against impacts: IK 02
 Protection against solid bodies and/or liquids: IP 20

■ **5.2 Material characteristics**

Cover plate: PC
 Mechanism casing with grid: Fibreglass-reinforced (10%) PC
 Halogen-free
 UV-resistant
 Self-extinguishing: 650°C/30 s

■ **5.3 Electrical characteristics**

Powered by a CR2032 - 3 V lithium battery (supplied)
 Battery life: 8 years for 10 activations a day

ZigBee radio technology

frequency bands: 2.4 GHz to 2.4835 GHz
 Power level: < 100 mW

■ **5.4 Climate characteristics**

Storage temperature: 0° C to + 45° C
 Usage temperature: +5° C to + 35° C

6. CARE

Clean the surface with a cloth.
 Do not use acetone, tar-removing cleaning agents or trichloroethylene.

Resistant to the following products:
 Hexane, methylated spirit, soapy water, diluted ammonia, bleach diluted to 10%, window-cleaning products, pre-impregnated wipes.

Caution: Always test before using special cleaning products.



Take care to recycle the battery appropriately.

7. STANDARDS AND APPROVALS

Compliant with installation and manufacturing standards.
 See e.catalogue.

The undersigned, LEGRAND, declares that the radio-electric equipment type (2 815 12DS/MB/MW - 2 815 13DS/MB/MW - 2 815 14DS/MB/MW) complies with directive 2014/53/EU.

The full text of the EU declaration of conformity is available on the following website: www.legrandoc.com