

## flush mounting power and data module



0535 63 with WD



0535 64 with WD



0535 65 with WD


Already to embed solution for all dry support with thickness between 3 and 25 mm.

Conform to standard NFC 61-314 which ensures safety of the user Aesthetic product (no visible screw), thickness of 6mm only.

Product available in 8 and 12 module, with the option of configuring power sockets, data, AV, protection etc.

3 Finishes; white/ black and aluminium

Pack	Cat.Nos	Flush mounting power and data module to be equipped
		Aluminium extensions with cable guide (reversible) To be equipped with Arteor sockets
		<b>8 module; length - 180 mm</b>
1	<b>0535 60</b>	Flush 8 module white finish
1	<b>0535 61</b>	Flush 8 module stainless finish
1	<b>0535 62</b>	Flush 8 module black finish
		<b>12 module; length - 270 mm</b>
1	<b>0535 63</b>	Flush 12 module white finish
1	<b>0535 64</b>	Flush 12 module stainless finish
1	<b>0535 65</b>	Flush 12 module black Finish




## flush mounting power & data module

### ■ APPLICATION


Flush mounting power & data modules can be installed in dry supports such as :

- partition walls (fixed or mobile) in offices
- in office furniture (horizontally or vertically)

1. Vertically : partition between two desks ; plasterboard...

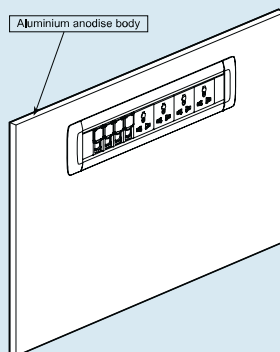


2. Horizontally : desk top ; meeting room table...

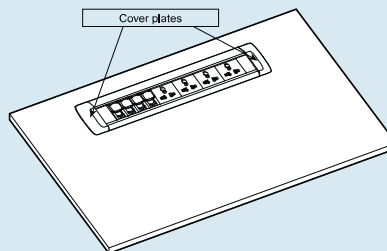

### Module to be connected:

Delivered without cord to be connected to screw terminal block.



To be connected with cords :  
HO5 VVF 3G 1.5 mm<sup>2</sup> or 3G 2.5 mm<sup>2</sup>  
HO7 RNF 3G 1.5 mm<sup>2</sup> or 3G 2.5 mm<sup>2</sup>

Note: Connection (for power and data) can be done in both sides according to the constraint of the installation site.

### ■ INSTALLATION

**Cat.Nos 0535 60/61/62/63/64/65**

With screws/clamps : Fixes itself on the wall (in the plasterboard) integration in dry wall horizontally or vertically

1 – Cut the wall to fix the module

