


Rigid Locknuts

Zinc Die Cast

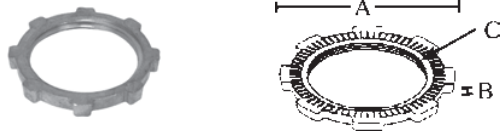

Features

- Tightens without deformation
- Serrated teeth prevent loosening from vibrations

Applications

- Affixes Rigid conduit to an electrical box or other metal enclosure
- To connect externally threaded conduit connector to a threadless opening in a box or enclosure

Standard Material


- Zinc die cast



Catalog Number	Size	Threads Per Inch	Unit Carton	Ship Case	Weight/Case	Dimensions (in)		Thread Pitch Diameter
						A	B	
LKNZ050	½"	14	200	2000	20	1.12	.15	.787-.797
LKNZ075	¾"	14	100	1000	20	1.33	.15	.999-1.009
LKNZ100	1"	11-½	100	1000	20	1.68	.19	1.250-1.260
LKNZ125	1-¼"	11-½	50	500	20	2.15	.19	1.595-1.605
LKNZ150	1-½"	11-½	50	500	20	2.35	.19	1.837-1.847
LKNZ200	2"	11-½	50	200	12	2.89	.19	2.307-2.317
LKNZ250	2-½"	8	25	100	13	3.43	.25	2.772-2.788
LKNZ300	3"	8	25	100	18	4.12	.25	3.403-3.414
LKNZ350	3-½"	8	10	40	13	4.67	.27	3.892-3.904
LKNZ400	4"	8	10	40	15	5.25	.27	4.399-4.411

Rigid Locknuts

Steel

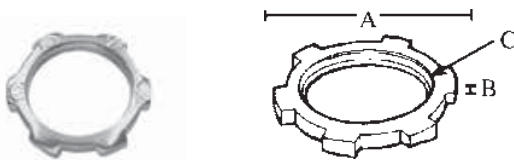

Features

- Tightens without deformation

Applications

- To connect externally threaded conduit connector to a threadless opening in a box or enclosure

Standard Material

- Steel

Standard Finish

- Zinc plated



Catalog Number	Size	Threads Per Inch	Unit Carton	Ship Case	Weight/Case	Dimensions (in)		Thread Pitch Diameter
						A	B	
LKN050	½"	14	100	2000	20	1.15	.110	.787-.797
LKN075	¾"	14	100	1000	20	1.45	.115	.999-1.009
LKN100	1"	11-½	100	1000	30	1.75	.140	1.250-1.260
LKN125	1-¼"	11-½	50	500	20	2.10	.140	1.595-1.605
LKN150	1-½"	11-½	50	500	30	2.40	.140	1.837-1.847
LKN200	2"	11-½	25	250	20	2.95	.140	2.307-2.317
LKN250	2-½"	8	—	50	6	3.55	.185	2.772-2.788
LKNZ00	3"	8	—	50	9	3.55	.190	3.403-3.414
LKN350	3-½"	8	—	25	6	4.20	.190	3.892-3.904
LKN400	4"	8	—	25	7	4.75	.190	4.399-4.411
LKN500	5"	8	—	10	5	6.67	.380	5.488-5.500
LKN600	6"	8	—	10	8	7.93	.400	6.545-6.557