


Rigid Elbows

90° - Galvanized Steel

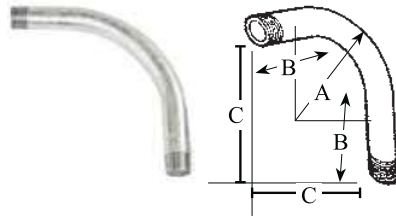

Features

- Low conductivity, high corrosion resistance
- Smooth defect free interior and exterior

Applications

- For a secure connection to Rigid conduit; bend enables directional changes in conduit

Standard Material


- Galvanized steel



Catalog Number	Size	Ship Case	Weight/Case	(A) Min. UL Radius	(B) Straight Leg Each End	(C) Offset
RL9050	½"	50	40	4.00	2.875	6.343
RL9075	¾"	50	54	4.50	2.875	6.781
RL9100	1"	20	40	5.750	3.00	8.901
RL9125	1-¼"	20	60	7.250	3.25	10.25
RL9150	1-½"	10	42	8.250	3.625	11.937
RL9200	2"	10	68	9.50	4.1875	14.031
RL9250	2-½"	1	13	10.50	5.25	16.00
RL9300	3"	1	18	13.00	5.8125	18.947
RL9350	3-½"	1	26	15.00	6.75	22.218
RL9400	4"	1	33	16.00	6.9375	23.437
RL9500	5"	1	45	24.00	11.125	36.156
RL9600	6"	1	48	30.00	12.4375	41.460

Rigid Elbows

45° - Galvanized Steel

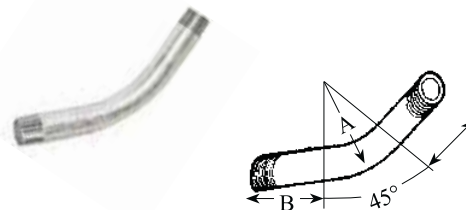

Features

- Low conductivity, high corrosion resistance
- Smooth defect free interior and exterior

Applications

- For a secure connection to Rigid conduit; bend enables directional changes in conduit

Standard Material

- Galvanized steel



Catalog Number	Size	Ship Case	Weight/Case	(A) Min. UL Radius	(B) Straight Leg Each End
RL4050	½"	50	26	4.00	2.875
RL4075	¾"	50	38	4.50	2.875
RL4100	1"	35	45	5.750	3.00
RL4125	1-¼"	30	60	7.250	3.25
RL4150	1-½"	15	45	8.250	3.625
RL4200	2"	15	68	9.5	4.1875
RL4250	2-½"	1	8	10.5	5.25
RL4300	3"	1	13	13.00	5.8125
RL4350	3-½"	1	16	15.00	6.75
RL4400	4"	1	22	16.00	6.9375
RL4500	5"	1	45	24.00	8.125
RL4600	6"	1	71	30.00	13.25