


Rigid Straps

Snap-On Type One Hole - Steel

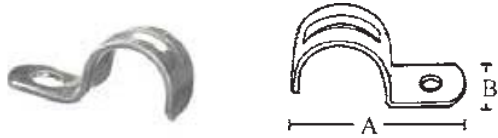

Features

- Inverted rib for strength
- Easy to install

Applications

- Indoor or outdoor use
- Use to secure Rigid or IMC conduit to wood, masonry or where greater load bearing is required

Standard Material

- Steel

Catalog Number	Size	Unit Carton	Ship Case	Weight/ Case	Dimensions (in)	
					A	B
RS1050	½"	50	500	21	1.91	.625
RS1075	¾"	50	500	15	2.21	.750
RS1100	1"	25	250	25	2.57	.875
RS1125	1-¼"	20	200	20	2.79	.880
RS1150	1-½"	20	200	32	3.69	.899
RS1200	2"	10	100	22	4.17	1.14
RS1250	2-¼"	—	50	21	5.00	1.28
RS1300	3"	—	25	13	5.55	1.28
RS1350	3-½"	—	25	18	6.37	1.28
RS1400	4"	—	25	20	6.87	1.28
RS1500	5"	—	10	5	9.00	1.50
RS1600	6"	—	10	6	10.35	1.50

*EMT and Rigid

Snap-On Type Two Hole - Steel



Features

- Greater load bearing capability
- Easy to install

Applications

- Indoor or outdoor use
- Use to secure Rigid or IMC conduit to wood, masonry or where greater load bearing is required

Standard Material

- Steel

Catalog Number	Size	Unit Carton	Ship Case	Weight/ Case	Dimensions (in)	
					A	B
RS2050	½"	50	500	13	2.43	.625
RS2075	¾"	50	500	16	2.81	.685
RS2100	1"	25	250	12	3.28	.750
RS2125	1-¼"	20	200	13	4.02	.875
RS2150	1-½"	10	100	12	4.58	1.00
RS2200	2"	—	50	7	5.22	1.00
RS2250	2-½"	—	25	6	5.91	1.00
RS2300	3"	—	25	7	6.71	1.00
RS2350	3-½"	—	25	8	7.51	1.00
RS2400	4"	—	25	7	8.31	1.00
RS2500	5"	—	10	5	10.60	1.25
RS2600	6"	—	10	6	11.85	1.25

*EMT and Rigid