# **Applications:**

SLB and LBY elbows are installed in conduit systems to:

- Act as service entrance elbows between service entrance and vertical weatherhead conduit runs
- Make 90° bends in conduit systems where space is limited
- Act as pull outlets
- Provide access to conductors for maintenance and future system changes

ET short radius tees are installed in conduit systems:

 In concealed conduit runs allowing single conduit stub up to outlet boxes located above or below main conduit run.
 Eliminates separate feed and return conduits to flush floor box or junction box

#### **Features:**

SLB elbows have:

- · Compact overall size and short hubs
- Taper tapped hubs and integral bushing for standard threaded conduit
- · Covers and gaskets furnished

LBY elbows have:

- Maximum volume for bends within a compact overall size
- Screw-on cover for ease of installation and removal
- Cover openings on an angle, permitting conductors to be pulled straight through either hub
- Taper tapped hubs and integral bushing for standard threaded conduit

ET short radius tees have:

- Compact size, small radius of bend for use in concealed or open conduit systems. Particularly suited for use in shallow floors or partitions
- Taper tapped hubs and integral bushing for standard threaded conduit

# Certifications and Compliances:

UL Standard: 514BFed. Spec.: W-C-586a

# **Standard Materials:**

- SLB elbows copper-free aluminum
- LBY elbows Feraloy® iron alloy
- ET tees Feraloy iron alloy

### **Standard Finishes:**

- Copper-free aluminum natural
- Feraloy iron alloy electrogalvanized and aluminum acrylic paint

# **Options:**

Description
Finishes – LBY elbows:
Corro-free™ epoxy power coat
Material (LBY only) – copper-free
aluminum construction

# **SLB** (includes cover)



Size	Cat. #
1/2	SLB1
3/4	SLB2
1	SLB3
11/4	SLB4
11/2	SLB5
2	SLB6

# LBY (includes cover)




Size	Cat. #
1/2	LBY15
3/4	LBY25
1	LBY35
11/4	LBY45
11/2	LBY55



Size	Cat. #
3/4 - 1/2 - 1/2	ET218
3/4 - 3/4 - 3/4	ET228
$1 - \frac{3}{4} - \frac{3}{4}$	ET328
Largest hub shown at top	of photo

# Dimensions In Inches:

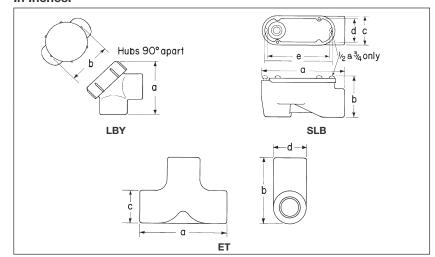

Suffix

S752

SA

SLB Size	1/2	3/4	1	<b>1</b> <sup>3</sup> / <sub>4</sub>	<b>1</b> ½	2	
a	31/8	31/2	41/8	53/8	623/32	73/4	
b	1 25/32	2	19/32	225/32	31/32	329/32	
С	<b>1</b> 3/ <sub>16</sub>	13/8	<b>1</b> 11/16	23/32	23/8	3	
d	1	<b>1</b> 3/ <sub>16</sub>	<b>1</b> 15/32	17/8	2 <sup>5</sup> / <sub>32</sub>	25/8	
е	211/16	215/16	311/32	43/4	61/32	631/32	
LBY							
Size	1/2	3/4		1	13/4	11/2	
a	213/16	33/16		31/4	325/32	41/2	
b	2	21/4		21/2	215/16	33/8	
ET							
Size	3/4 - 1/2 - 1/2		3	3/4 - 3/4 - 3/4		$1 - \frac{3}{4} - \frac{3}{4}$	
a	4		4	4	4		
b	25/8		3	3	3		
С	1	1/4	-	11/2	11/3	2	
d	1	1/2	-	11/2	13/	4	