


Product datasheet

Specifications



Front plate, PrismaSeT G, for INS-INV 250 to 630, 10M, Vertical, fixed, with or without spreaders, W300, white, RAL 9003

LVS03281

Main

Range	PrismaSeT
Range Of Product	PrismaSeT G
Product Or Component Type	Front plate
Accessory / Separate Part Category	Installation accessory
Range Compatibility	PrismaSeT PrismaSeT G duct
Type Of Front Plate	Cut-out
Installed Device	ComPact: fixed INS320...400 - control: direct front rotary handle - vertical installation ComPact: fixed INS500...630 - control: direct front rotary handle - vertical installation ComPact: fixed INV320...400 - control: direct front rotary handle - vertical installation ComPact: fixed INV500...630 - control: direct front rotary handle - vertical installation
Poles Description	1 x 3P: mounting plate support: INS320...400 vertical installation 1 x 4P: mounting plate support: INS320...400 vertical installation 1 x 3P: mounting plate support: INS500...630 vertical installation 1 x 4P: mounting plate support: INS500...630 vertical installation 1 x 3P: mounting plate support: INV320...400 vertical installation 1 x 4P: mounting plate support: INV320...400 vertical installation 1 x 3P: mounting plate support: INV500...630 vertical installation 1 x 4P: mounting plate support: INV500...630 vertical installation
Operating Position	Vertical

Complementary

Enclosure/Cubicle Description	Floor-standing duct - width 300 mm Wall-mounted duct - width 300 mm
Connection Position	Direct connection
Number Of Vertical Modules [50 Mm]	10
Standards	IEC 61439-1 IEC 61439-2
Product Certifications	ASTA
Material	Steel
Surface Finish	Matt Textured
Protective Treatment	Electrophoresis treatment and hot-polymerised polyester epoxy powder
Colour	White (RAL 9003)
Height	500 mm
Width	300 mm
Net Weight	0.96 kg
Quantity Per Set	Set of 1

Functional Unit	300 mm PrismaSeT G floor-standing duct ComPact INS320...400 fixed direct front rotary handle vertical 3P 1 direct with long terminal shield 10
	300 mm PrismaSeT G wall-mounted duct ComPact INS320...400 fixed direct front rotary handle vertical 3P 1 direct with long terminal shield 10
	300 mm PrismaSeT G floor-standing duct ComPact INS320...400 fixed direct front rotary handle vertical 4P 1 direct with long terminal shield 10
	300 mm PrismaSeT G wall-mounted duct ComPact INS320...400 fixed direct front rotary handle vertical 4P 1 direct with long terminal shield 10
	300 mm PrismaSeT G floor-standing duct ComPact INS500...630 fixed direct front rotary handle vertical 3P 1 direct with long terminal shield 12
	300 mm PrismaSeT G wall-mounted duct ComPact INS500...630 fixed direct front rotary handle vertical 3P 1 direct with long terminal shield 12
	300 mm PrismaSeT G floor-standing duct ComPact INS500...630 fixed direct front rotary handle vertical 4P 1 direct with long terminal shield 12
	300 mm PrismaSeT G wall-mounted duct ComPact INS500...630 fixed direct front rotary handle vertical 4P 1 direct with long terminal shield 12
	300 mm PrismaSeT G floor-standing duct ComPact INV320...400 fixed direct front rotary handle vertical 3P 1 direct with long terminal shield 10
	300 mm PrismaSeT G wall-mounted duct ComPact INV320...400 fixed direct front rotary handle vertical 3P 1 direct with long terminal shield 10
	300 mm PrismaSeT G floor-standing duct ComPact INV320...400 fixed direct front rotary handle vertical 4P 1 direct with long terminal shield 10
	300 mm PrismaSeT G wall-mounted duct ComPact INV320...400 fixed direct front rotary handle vertical 4P 1 direct with long terminal shield 10
	300 mm PrismaSeT G floor-standing duct ComPact INV500...630 fixed direct front rotary handle vertical 3P 1 direct with long terminal shield 12
	300 mm PrismaSeT G wall-mounted duct ComPact INV500...630 fixed direct front rotary handle vertical 3P 1 direct with long terminal shield 12
	300 mm PrismaSeT G floor-standing duct ComPact INV500...630 fixed direct front rotary handle vertical 4P 1 direct with long terminal shield 12
	300 mm PrismaSeT G wall-mounted duct ComPact INV500...630 fixed direct front rotary handle vertical 4P 1 direct with long terminal shield 12

Packing Units

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	3.0 cm
Package 1 Width	26.5 cm
Package 1 Length	51.5 cm
Package 1 Weight	960.0 g
Unit Type Of Package 2	CAR
Number Of Units In Package 2	10
Package 2 Height	17.0 cm
Package 2 Width	27.5 cm
Package 2 Length	52.5 cm
Package 2 Weight	9.857 kg
Unit Type Of Package 3	P12
Number Of Units In Package 3	90
Package 3 Height	41.0 cm
Package 3 Width	80.0 cm
Package 3 Length	120.0 cm
Package 3 Weight	100.0 kg

Sustainability

Green Premium™ label is Schneider Electric's commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

[Learn more about Green Premium >](#)

[Guide to assess a product's sustainability >](#)



Transparency RoHS/REACH

Well-being performance

✓ Reach Free Of Svhc

✓ Toxic Heavy Metal Free

✓ Mercury Free

✓ Rohs Exemption Information [Yes](#)

✓ Pvc Free

✓ Halogen Free Plastic Parts Product

Certifications & Standards

Reach Regulation

[REACH Declaration](#)

Eu Rohs Directive

Pro-active compliance (Product out of EU RoHS legal scope)

[EU RoHS Declaration](#)

China Rohs Regulation

[China RoHS declaration](#)

Pro-active China RoHS declaration (out of China RoHS legal scope)


Environmental Disclosure

[Product Environmental Profile](#)

Circularity Profile

No need of specific recycling operations

Dimensions

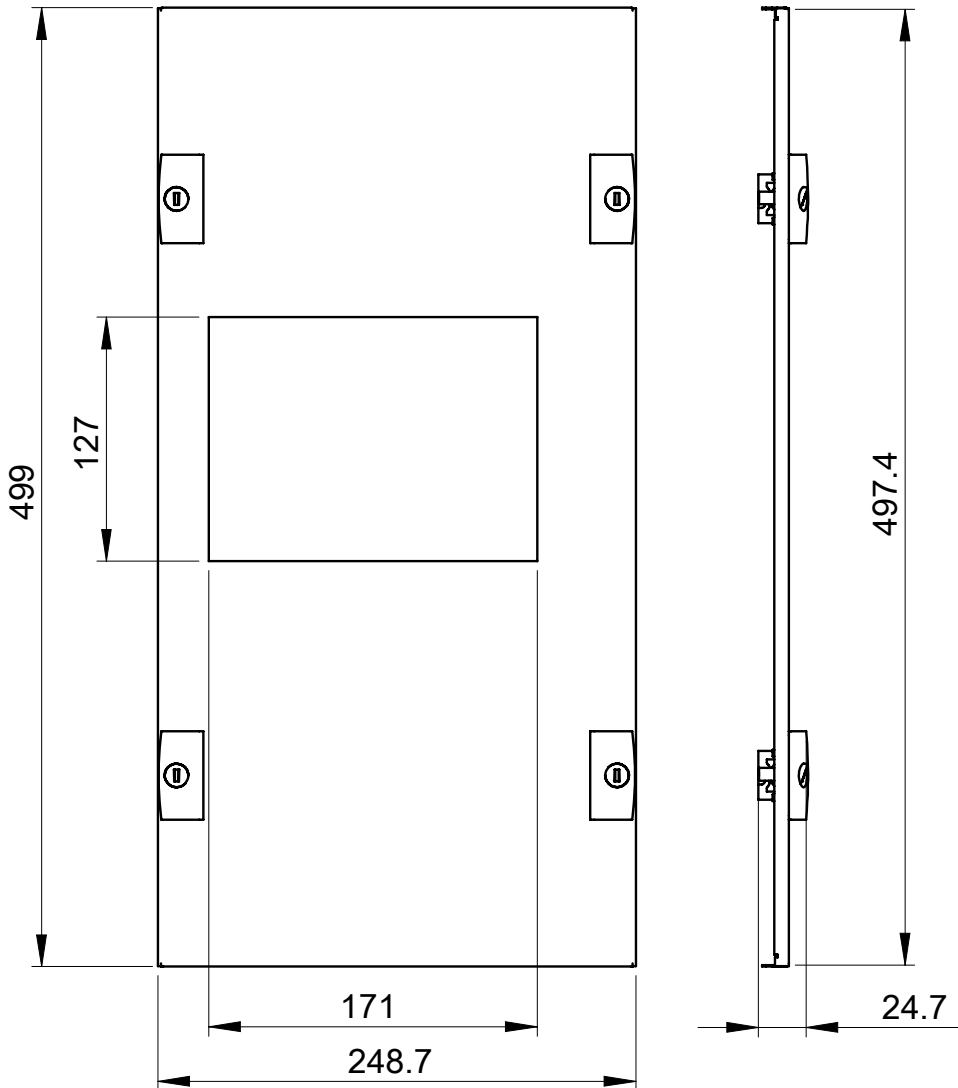

- All dimensions are approximate and are in mm.
- Also see technical documentation.