
Product datasheet

Specification





Mounting Plate, PrismaSeT P, VIGI NSX/CVS 250A 4P toggle horizontal fixed, enclosure W650mm

LVS03412

Main

Range	PrismaSeT
Range Of Produc	PrismaSeT P
Product Or Component Type	Mounting plate
Accessory / Separate Part Category	Installation accessory
Range Compatibility	PrismaSeT PrismaSeT P cubicle
Installation Description	Cubicle - width 650 mm depth 400 mm
Installed Device	EasyPact: fixed CVS100160 without earth leakage protection - control: toggle - horizontal installation EasyPact: fixed CVS250 without earth leakage protection - control: toggle - horizontal installation ComPact: fixed INS250 - control: direct front rotary handle - horizontal installation ComPact: fixed INV250 - control: direct front rotary handle - horizontal installation ComPact: fixed NSX100160 without earth leakage protection - control: toggle - horizontal installation ComPact: fixed NSX250 without earth leakage protection - control: toggle - horizontal installation EasyPact: fixed CVS100160 with earth leakage protection - control: toggle - horizontal installation ComPact: fixed CVS250 with earth leakage protection - control: toggle - horizontal installation ComPact: fixed NSX100160 with earth leakage protection - control: toggle - horizontal installation ComPact: fixed NSX100160 with earth leakage protection - control: toggle - horizontal installation
Poles Description	1 x 4P: fixed CVS100160 horizontal installation 1 x 4P: fixed CVS250 horizontal installation 1 x 3P: fixed INS250 horizontal installation 1 x 4P: fixed INS250 horizontal installation 1 x 3P: fixed INV250 horizontal installation 1 x 4P: fixed INV250 horizontal installation 1 x 4P: fixed INV250 horizontal installation 1 x 4P: fixed NSX100160 horizontal installation 1 x 4P: fixed NSX250 horizontal installation
Number Of Vertical Modules [50 Mm]	4 module(s): CVS100160 without earth leakage protection, direct in 650 mm Widecubicle 4 module(s): CVS250 without earth leakage protection, direct in 650 mm Widecubicle 4 module(s): INS250, direct in 650 mm Widecubicle 4 module(s): INV250, direct in 650 mm Widecubicle 4 module(s): NSX100160 without earth leakage protection, direct in 650 mm Widecubicle 4 module(s): NSX250 without earth leakage protection, direct in 650 mm Widecubicle 4 module(s): CVS100160 with earth leakage protection, direct in 650 mm Widecubicle 4 module(s): CVS250 with earth leakage protection, direct in 650 mm Widecubicle 4 module(s): NSX100160 with earth leakage protection, direct in 650 mm Widecubicle 4 module(s): NSX100160 with earth leakage protection, direct in 650 mm Widecubicle 4 module(s): NSX250 with earth leakage protection, direct in 650 mm Widecubicle
Standards	IEC 61439-2

Product Certifications ASTA

Complementary

Complementary		
Material	Sheet steel	
Protective Treatment	Electrophoresis treatment and hot-polymerised polyester epoxy powder	
Surface Finish	Textured Matt	
Colour	White (RAL 9003)	
Width	650 mm	
Height	192 mm	
Net Weight	1.48 kg	
Functional Unit	650 mm 400 mm PrismaSeT P cubicle EasyPact CVS100160 without fixed toggle horizontal 4P 1 direct 4 12.5 mm 650 mm 400 mm PrismaSeT P cubicle EasyPact CVS250 without fixed toggle horizontal 4P 1 direct 4 12.5 mm 650 mm 400 mm PrismaSeT P cubicle ComPact INS250 fixed direct front rotary handle horizontal 3P 1 direct 4 12.5 mm 650 mm 400 mm PrismaSeT P cubicle ComPact INS250 fixed direct front rotary handle horizontal 4P 1 direct 4 12.5 mm 650 mm 400 mm PrismaSeT P cubicle ComPact INV250 fixed direct front rotary handle horizontal 3P 1 direct 4 12.5 mm 650 mm 400 mm PrismaSeT P cubicle ComPact INV250 fixed direct front rotary handle horizontal 4P 1 direct 4 12.5 mm 650 mm 400 mm PrismaSeT P cubicle ComPact INV250 fixed direct front rotary handle horizontal 4P 1 direct 4 12.5 mm 650 mm 400 mm PrismaSeT P cubicle ComPact NSX100160 without fixed toggle horizontal 4P 1 direct 4 12.5 mm 650 mm 400 mm PrismaSeT P cubicle EasyPact CVS100160 with fixed toggle horizontal 4P 1 direct 4 12.5 mm 650 mm 400 mm PrismaSeT P cubicle EasyPact CVS250 with fixed toggle horizontal 4P 1 direct 4 12.5 mm 650 mm 400 mm PrismaSeT P cubicle EasyPact CVS250 with fixed toggle horizontal 4P 1 direct 4 12.5 mm 650 mm 400 mm PrismaSeT P cubicle ComPact NSX100160 with fixed toggle horizontal 4P 1 direct 4 12.5 mm 650 mm 400 mm PrismaSeT P cubicle ComPact NSX100160 with fixed toggle horizontal 4P 1 direct 4 12.5 mm	

Packing Units

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	4.5 cm
Package 1 Width	19.5 cm
Package 1 Length	57.7 cm
Package 1 Weight	1.454 kg
Unit Type Of Package 2	CAR
Number Of Units In Package 2	5
Package 2 Height	22.5 cm
Package 2 Width	22 cm
Package 2 Length	61.2 cm
Package 2 Weight	7.661 kg
Unit Type Of Package 3	P12
Number Of Units In Package 3	100
Package 3 Height	103 cm
Package 3 Width	80 cm
Number Of Units In Package 3 Package 3 Height	100 103 cm

Package 3 Length	120 cm
Package 3 Weight	164 kg



Green PremiumTM label is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >





Transparency RoHS/REACh

Well-being performance


⊘	Reach Free Of Svhc
⊘	Toxic Heavy Metal Free
Ø	Mercury Free
9	Rohs Exemption Information Yes
⊘	Pvc Free
9	Halogen Free Plastic Parts Product


Certifications & Standards

Reach Regulation	REACh Declaration
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
China Rohs Regulation	China RoHS declaration Pro-active China RoHS declaration (out of China RoHS legal scope)
Environmental Disclosure	Product Environmental Profile
Circularity Profile	No need of specific recycling operations

Technical illustration

Dimensions

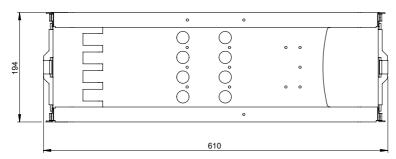



- All dimensions are approximate and are in mm. Also see technical documentation.