


Product datasheet

Specifications



Mounting plate, PrismaSeT P, for Vigi NSX/ CVS 4P 630A, horizontal fixed, toggle, W650mm

LVS03452

Main

Range	PrismaSeT
Range Of Product	PrismaSeT P
Product Or Component Type	Mounting plate
Accessory / Separate Part Category	Installation accessory
Range Compatibility	PrismaSeT PrismaSeT P cubicle
Installation Description	Cubicle - width 650 mm depth 400 mm
Installed Device	<p>EasyPact: fixed CVS400 without earth leakage protection - control: toggle - horizontal installation</p> <p>EasyPact: fixed CVS630 without earth leakage protection - control: toggle - horizontal installation</p> <p>EasyPact: fixed EZC400 - control: toggle - horizontal installation</p> <p>EasyPact: fixed EZC630 - control: toggle - horizontal installation</p> <p>ComPact: fixed INS320...400 - control: direct front rotary handle - horizontal installation</p> <p>ComPact: fixed INS500...630 - control: direct front rotary handle - horizontal installation</p> <p>ComPact: fixed INV320...400 - control: direct front rotary handle - horizontal installation</p> <p>ComPact: fixed INV500...630 - control: direct front rotary handle - horizontal installation</p> <p>ComPact: fixed NSX400 without earth leakage protection - control: toggle - horizontal installation</p> <p>ComPact: fixed NSX630 without earth leakage protection - control: toggle - horizontal installation</p> <p>EasyPact: fixed CVS400 with earth leakage protection - control: toggle - horizontal installation</p> <p>EasyPact: fixed CVS630 with earth leakage protection - control: toggle - horizontal installation</p> <p>ComPact: fixed NSX400 with earth leakage protection - control: toggle - horizontal installation</p> <p>ComPact: fixed NSX630 with earth leakage protection - control: toggle - horizontal installation</p>
Poles Description	<p>1 x 4P: fixed CVS400 horizontal installation</p> <p>1 x 4P: fixed CVS630 horizontal installation</p> <p>1 x 4P: fixed EZC400 horizontal installation</p> <p>1 x 4P: fixed EZC630 horizontal installation</p> <p>1 x 3P: fixed INS320...400 horizontal installation</p> <p>1 x 4P: fixed INS320...400 horizontal installation</p> <p>1 x 3P: fixed INS500...630 horizontal installation</p> <p>1 x 4P: fixed INS500...630 horizontal installation</p> <p>1 x 3P: fixed INV320...400 horizontal installation</p> <p>1 x 4P: fixed INV320...400 horizontal installation</p> <p>1 x 3P: fixed INV500...630 horizontal installation</p> <p>1 x 4P: fixed INV500...630 horizontal installation</p> <p>1 x 4P: fixed NSX400 horizontal installation</p> <p>1 x 4P: fixed NSX630 horizontal installation</p>

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Number Of Vertical Modules [50 Mm]	5 module(s): CVS400 without earth leakage protection , direct in 650 mm Widecubicle 5 module(s): CVS630 without earth leakage protection , direct in 650 mm Widecubicle 5 module(s): EZC400, direct in 650 mm Widecubicle 5 module(s): EZC630, direct in 650 mm Widecubicle 5 module(s): INS320...400, direct in 650 mm Widecubicle 5 module(s): INS500...630, direct in 650 mm Widecubicle 5 module(s): INV320...400, direct in 650 mm Widecubicle 5 module(s): INV500...630, direct in 650 mm Widecubicle 5 module(s): NSX400 without earth leakage protection , direct in 650 mm Widecubicle 5 module(s): NSX630 without earth leakage protection , direct in 650 mm Widecubicle 5 module(s): CVS400 with earth leakage protection , direct in 650 mm Widecubicle 5 module(s): CVS630 with earth leakage protection , direct in 650 mm Widecubicle 5 module(s): NSX400 with earth leakage protection , direct in 650 mm Widecubicle 5 module(s): NSX630 with earth leakage protection , direct in 650 mm Widecubicle
---	--

Standards	IEC 61439-2
------------------	-------------

Product Certifications	ASTA
-------------------------------	------

Complementary

Material	Sheet steel
-----------------	-------------

Protective Treatment	Electrophoresis treatment and hot-polymerised polyester epoxy powder
-----------------------------	--

Surface Finish	Matt Textured
-----------------------	------------------

Colour	White (RAL 9003)
---------------	------------------

Width	650 mm
--------------	--------

Height	250 mm
---------------	--------

Net Weight	1.76 kg
-------------------	---------

Functional Unit	650 mm 400 mm PrismaSeT P cubicle EasyPact CVS400 without fixed toggle horizontal 4P 1 direct 5 12.5 mm 650 mm 400 mm PrismaSeT P cubicle EasyPact CVS630 without fixed toggle horizontal 4P 1 direct 5 12.5 mm 650 mm 400 mm PrismaSeT P cubicle EasyPact EZC400 fixed toggle horizontal 4P 1 direct 5 12.5 mm 650 mm 400 mm PrismaSeT P cubicle EasyPact EZC630 fixed toggle horizontal 4P 1 direct 5 12.5 mm 650 mm 400 mm PrismaSeT P cubicle ComPact INS320...400 fixed direct front rotary handle horizontal 3P 1 direct 5 12.5 mm 650 mm 400 mm PrismaSeT P cubicle ComPact INS320...400 fixed direct front rotary handle horizontal 4P 1 direct 5 12.5 mm 650 mm 400 mm PrismaSeT P cubicle ComPact INS500...630 fixed direct front rotary handle horizontal 3P 1 direct 5 12.5 mm 650 mm 400 mm PrismaSeT P cubicle ComPact INS500...630 fixed direct front rotary handle horizontal 4P 1 direct 5 12.5 mm 650 mm 400 mm PrismaSeT P cubicle ComPact INV320...400 fixed direct front rotary handle horizontal 3P 1 direct 5 12.5 mm 650 mm 400 mm PrismaSeT P cubicle ComPact INV320...400 fixed direct front rotary handle horizontal 4P 1 direct 5 12.5 mm 650 mm 400 mm PrismaSeT P cubicle ComPact INV500...630 fixed direct front rotary handle horizontal 3P 1 direct 5 12.5 mm 650 mm 400 mm PrismaSeT P cubicle ComPact INV500...630 fixed direct front rotary handle horizontal 4P 1 direct 5 12.5 mm 650 mm 400 mm PrismaSeT P cubicle ComPact NSX400 without fixed toggle horizontal 4P 1 direct 5 12.5 mm 650 mm 400 mm PrismaSeT P cubicle ComPact NSX630 without fixed toggle horizontal 4P 1 direct 5 12.5 mm 650 mm 400 mm PrismaSeT P cubicle EasyPact CVS400 with fixed toggle horizontal 4P 1 direct 5 12.5 mm 650 mm 400 mm PrismaSeT P cubicle EasyPact CVS630 with fixed toggle horizontal 4P 1 direct 5 12.5 mm 650 mm 400 mm PrismaSeT P cubicle ComPact NSX400 with fixed toggle horizontal 4P 1 direct 5 12.5 mm 650 mm 400 mm PrismaSeT P cubicle ComPact NSX630 with fixed toggle horizontal 4P 1 direct 5 12.5 mm
------------------------	--

Packing Units

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	6.0 cm
Package 1 Width	24.5 cm
Package 1 Length	58.0 cm
Package 1 Weight	1.772 kg
Unit Type Of Package 2	CAR
Number Of Units In Package 2	5
Package 2 Height	32.0 cm
Package 2 Width	25.0 cm
Package 2 Length	59.0 cm
Package 2 Weight	9.355 kg
Unit Type Of Package 3	P12
Number Of Units In Package 3	60
Package 3 Height	78.0 cm
Package 3 Width	80.0 cm
Package 3 Length	120.0 cm
Package 3 Weight	123.5 kg

Sustainability

Green Premium™ label is Schneider Electric's commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

[Learn more about Green Premium >](#)

[Guide to assess a product's sustainability >](#)



Transparency RoHS/REACH

Well-being performance

✓ Reach Free Of Svhc

✓ Toxic Heavy Metal Free

✓ Mercury Free

✓ Rohs Exemption Information [Yes](#)

✓ Pvc Free

✓ Halogen Free Plastic Parts Product

Certifications & Standards

Reach Regulation

[REACH Declaration](#)

Eu Rohs Directive

Pro-active compliance (Product out of EU RoHS legal scope)

[EU RoHS Declaration](#)

China Rohs Regulation

[China RoHS declaration](#)

Pro-active China RoHS declaration (out of China RoHS legal scope)


Environmental Disclosure

[Product Environmental Profile](#)

Circularity Profile

No need of specific recycling operations

Dimensions

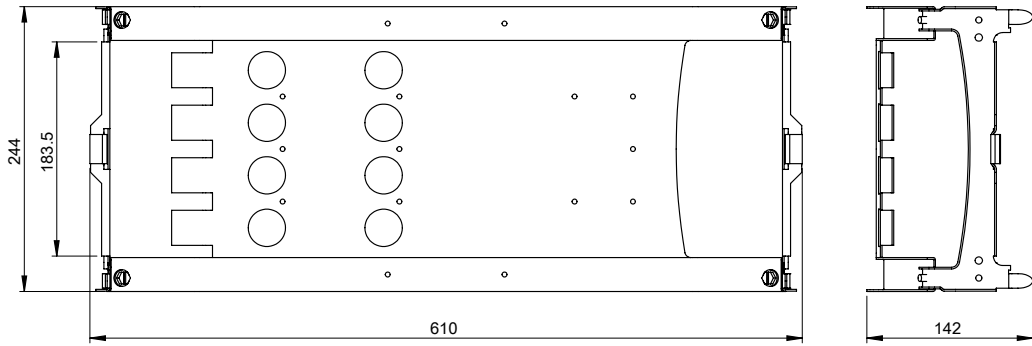

- All dimensions are approximate and are in mm.
- Also see technical documentation.