


Product datasheet

Specifications



Front plate, PrismaSeT P, for NS630b/1600 3/4P, vertical fixed, toggle rotary handle and motor mechanism, W400mm

LVS03697

Main

Range	PrismaSeT
Range Of Product	PrismaSeT P
Product Or Component Type	Front plate
Accessory / Separate Part Category	Installation accessory
Range Compatibility	PrismaSeT PrismaSeT P cubicle
Type Of Front Plate	Cut-out
Installed Device	ComPact: fixed NS1250 - control: toggle - vertical installation ComPact: fixed NS1250 - control: direct front rotary handle - vertical installation ComPact: fixed NS1600 - control: toggle - vertical installation ComPact: fixed NS1600 - control: direct front rotary handle - vertical installation ComPact: fixed NS630b...1000 - control: toggle - vertical installation ComPact: fixed NS630b...1000 - control: direct front rotary handle - vertical installation ComPact: fixed NS1250 - control: motor mechanism - vertical installation ComPact: fixed NS1600 - control: motor mechanism - vertical installation ComPact: fixed NS630b...1000 - control: motor mechanism - vertical installation
Poles Description	1 x 3P: mounting plate support: NS1250 vertical installation 1 x 4P: mounting plate support: NS1250 vertical installation 1 x 3P: mounting plate support: NS1600 vertical installation 1 x 4P: mounting plate support: NS1600 vertical installation 1 x 3P: mounting plate support: NS630b...1000 vertical installation 1 x 4P: mounting plate support: NS630b...1000 vertical installation
Operating Position	Horizontal

Complementary

Enclosure/Cubicle Description	Cubicle duct - width 400 mm depth 400 mm
Connection Position	Direct connection
Number Of Vertical Modules [50 Mm]	11
Standards	IEC 61439-2 IEC 61439-1
Product Certifications	ASTA
Material	Steel
Surface Finish	Matt Textured
Protective Treatment	Electrophoresis treatment and hot-polymerised polyester epoxy powder
Colour	White (RAL 9003)
Height	550 mm
Width	321 mm

Net Weight	2.24 kg
Quantity Per Set	Set of 1
Functional Unit	<p>400 mm 400 mm PrismaSeT P cubicle ComPact NS1250 fixed toggle vertical 3P 1 direct 36</p> <p>400 mm 400 mm PrismaSeT P cubicle ComPact NS1250 fixed toggle vertical 4P 1 direct 36</p> <p>400 mm 400 mm PrismaSeT P cubicle ComPact NS1250 fixed direct front rotary handle vertical 3P 1 direct 36</p> <p>400 mm 400 mm PrismaSeT P cubicle ComPact NS1250 fixed direct front rotary handle vertical 4P 1 direct 36</p> <p>400 mm 400 mm PrismaSeT P cubicle ComPact NS1250 fixed motor mechanism vertical 3P 1 direct 36</p> <p>400 mm 400 mm PrismaSeT P cubicle ComPact NS1250 fixed motor mechanism vertical 4P 1 direct 36</p> <p>400 mm 400 mm PrismaSeT P cubicle ComPact NS1600 fixed toggle vertical 3P 1 direct 36</p> <p>400 mm 400 mm PrismaSeT P cubicle ComPact NS1600 fixed toggle vertical 4P 1 direct 36</p> <p>400 mm 400 mm PrismaSeT P cubicle ComPact NS1600 fixed direct front rotary handle vertical 3P 1 direct 36</p> <p>400 mm 400 mm PrismaSeT P cubicle ComPact NS1600 fixed direct front rotary handle vertical 4P 1 direct 36</p> <p>400 mm 400 mm PrismaSeT P cubicle ComPact NS1600 fixed motor mechanism vertical 3P 1 direct 36</p> <p>400 mm 400 mm PrismaSeT P cubicle ComPact NS1600 fixed motor mechanism vertical 4P 1 direct 36</p> <p>400 mm 400 mm PrismaSeT P cubicle ComPact NS630b...1000 fixed toggle vertical 3P 1 direct 36</p> <p>400 mm 400 mm PrismaSeT P cubicle ComPact NS630b...1000 fixed toggle vertical 4P 1 direct 36</p> <p>400 mm 400 mm PrismaSeT P cubicle ComPact NS630b...1000 fixed direct front rotary handle vertical 3P 1 direct 36</p> <p>400 mm 400 mm PrismaSeT P cubicle ComPact NS630b...1000 fixed direct front rotary handle vertical 4P 1 direct 36</p> <p>400 mm 400 mm PrismaSeT P cubicle ComPact NS630b...1000 fixed motor mechanism vertical 3P 1 direct 36</p> <p>400 mm 400 mm PrismaSeT P cubicle ComPact NS630b...1000 fixed motor mechanism vertical 4P 1 direct 36</p>

Packing Units

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	8 cm
Package 1 Width	32.2 cm
Package 1 Length	55.5 cm
Package 1 Weight	2.171 kg
Unit Type Of Package 2	S04
Number Of Units In Package 2	3
Package 2 Height	30 cm
Package 2 Width	40 cm
Package 2 Length	60 cm
Package 2 Weight	6.91 kg
Unit Type Of Package 3	P12
Number Of Units In Package 3	24
Package 3 Height	74 cm
Package 3 Width	80 cm
Package 3 Length	120 cm
Package 3 Weight	67.28 kg

Sustainability

Green Premium™ label is Schneider Electric's commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

[Learn more about Green Premium >](#)

[Guide to assess a product's sustainability >](#)



Transparency RoHS/REACH

Well-being performance

✓ Reach Free Of Svhc

✓ Toxic Heavy Metal Free

✓ Mercury Free

✓ Rohs Exemption Information Yes

Certifications & Standards

Reach Regulation

[REACH Declaration](#)

Eu Rohs Directive

Pro-active compliance (Product out of EU RoHS legal scope)

[EU RoHS Declaration](#)

China Rohs Regulation

[China RoHS declaration](#)

Pro-active China RoHS declaration (out of China RoHS legal scope)


Environmental Disclosure

[Product Environmental Profile](#)

Circularity Profile

No need of specific recycling operations

Dimensions

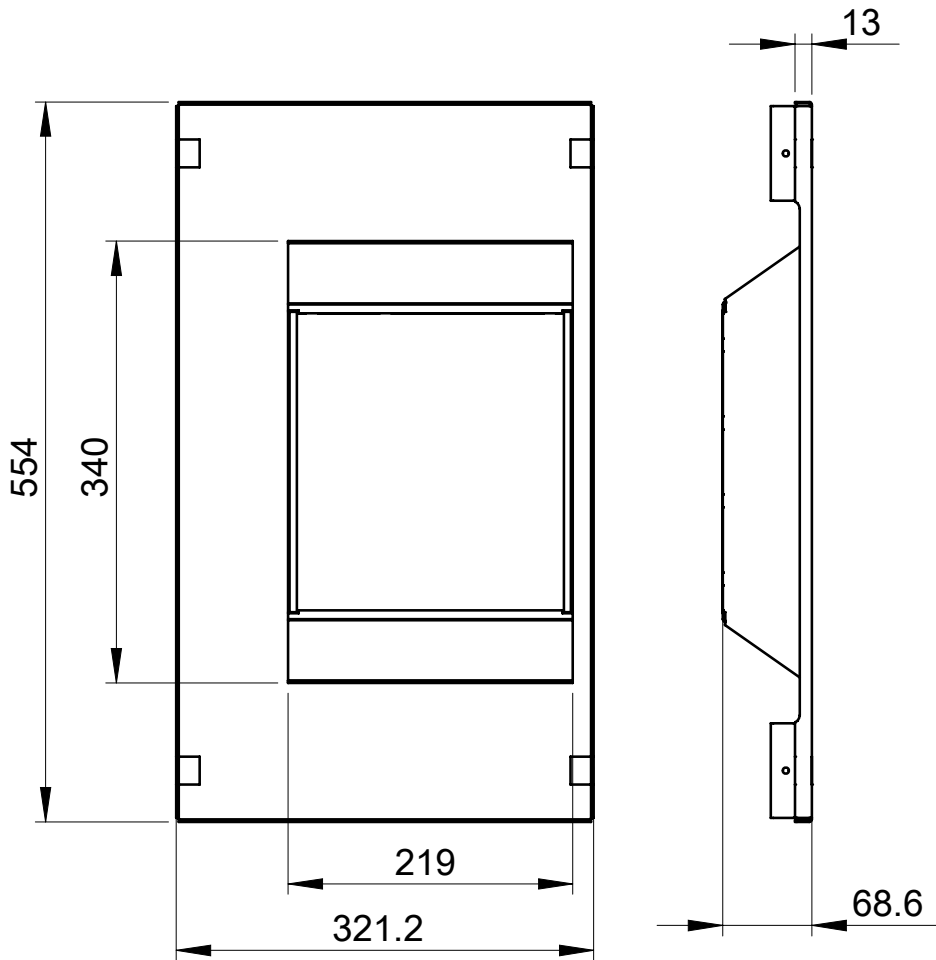

- All dimensions are approximate and are in mm.
- Also see technical documentation.