


Product datasheet

Specifications



Front plate, PrismaSeT P, for NS630b/1600, 7M, vertical fixed motor mechanism

LVS03701

Main

Range	PrismaSeT
Range Of Product	PrismaSeT P
Product Or Component Type	Front plate
Accessory / Separate Part Category	Installation accessory
Range Compatibility	PrismaSeT PrismaSeT P cubicle
Type Of Front Plate	Cut-out
Installed Device	ComPact: fixed NS1250 - control: motor mechanism - vertical installation ComPact: fixed NS1600 - control: motor mechanism - vertical installation ComPact: fixed NS630b...1000 - control: motor mechanism - vertical installation
Poles Description	1 x 3P: mounting plate support: NS1250 vertical installation 1 x 4P: mounting plate support: NS1250 vertical installation 1 x 3P: mounting plate support: NS1600 vertical installation 1 x 4P: mounting plate support: NS1600 vertical installation 1 x 3P: mounting plate support: NS630b...1000 vertical installation 1 x 4P: mounting plate support: NS630b...1000 vertical installation
Operating Position	Vertical

Complementary

Enclosure/Cubicle Description	Cubicle - width 650 mm depth 400 mm Cubicle - width 650 mm depth 800 mm
Connection Position	Rear connection Front connection
Number Of Vertical Modules [50 Mm]	7
Standards	IEC 61439-2 IEC 61439-1
Product Certifications	ASTA
Material	Steel
Surface Finish	Matt Textured
Protective Treatment	Electrophoresis treatment and hot-polymerised polyester epoxy powder
Colour	White (RAL 9003)
Height	350 mm
Width	500 mm
Net Weight	1.52 kg
Quantity Per Set	Set of 1

Functional Unit	650 mm 400 mm PrismaSeT P cubicle ComPact NS1250 fixed motor mechanism vertical 3P 1 front connection on Canalis 17
	650 mm 800 mm PrismaSeT P cubicle ComPact NS1250 fixed motor mechanism vertical 3P 1 rear connection on Canalis 16
	650 mm 400 mm PrismaSeT P cubicle ComPact NS1250 fixed motor mechanism vertical 3P 1 front connection on adaptor 14
	650 mm 400 mm PrismaSeT P cubicle ComPact NS1250 fixed motor mechanism vertical 4P 1 front connection on Canalis 17
	650 mm 800 mm PrismaSeT P cubicle ComPact NS1250 fixed motor mechanism vertical 4P 1 rear connection on Canalis 16
	650 mm 400 mm PrismaSeT P cubicle ComPact NS1250 fixed motor mechanism vertical 4P 1 front connection on adaptor 14
	650 mm 800 mm PrismaSeT P cubicle ComPact NS1250 fixed motor mechanism vertical 3P 1 rear connection on adaptor 10
	650 mm 800 mm PrismaSeT P cubicle ComPact NS1250 fixed motor mechanism vertical 4P 1 rear connection on adaptor 10
	650 mm 800 mm PrismaSeT P cubicle ComPact NS1600 fixed motor mechanism vertical 3P 1 rear connection on Canalis 16
	650 mm 400 mm PrismaSeT P cubicle ComPact NS1600 fixed motor mechanism vertical 3P 1 front connection on adaptor 14
	650 mm 800 mm PrismaSeT P cubicle ComPact NS1600 fixed motor mechanism vertical 4P 1 rear connection on Canalis 16
	650 mm 400 mm PrismaSeT P cubicle ComPact NS1600 fixed motor mechanism vertical 4P 1 front connection on adaptor 14
	650 mm 800 mm PrismaSeT P cubicle ComPact NS1600 fixed motor mechanism vertical 3P 1 rear connection on adaptor 10
	650 mm 800 mm PrismaSeT P cubicle ComPact NS1600 fixed motor mechanism vertical 4P 1 rear connection on adaptor 10
	650 mm 400 mm PrismaSeT P cubicle ComPact NS630b...1000 fixed motor mechanism vertical 3P 1 front connection on Canalis 17
	650 mm 800 mm PrismaSeT P cubicle ComPact NS630b...1000 fixed motor mechanism vertical 3P 1 rear connection on Canalis 16
	650 mm 400 mm PrismaSeT P cubicle ComPact NS630b...1000 fixed motor mechanism vertical 3P 1 front connection on adaptor 12
	650 mm 400 mm PrismaSeT P cubicle ComPact NS630b...1000 fixed motor mechanism vertical 4P 1 front connection on Canalis 17
	650 mm 800 mm PrismaSeT P cubicle ComPact NS630b...1000 fixed motor mechanism vertical 4P 1 rear connection on Canalis 16
	650 mm 400 mm PrismaSeT P cubicle ComPact NS630b...1000 fixed motor mechanism vertical 4P 1 front connection on adaptor 12
	650 mm 800 mm PrismaSeT P cubicle ComPact NS630b...1000 fixed motor mechanism vertical 3P 1 rear connection on adaptor 10
	650 mm 800 mm PrismaSeT P cubicle ComPact NS630b...1000 fixed motor mechanism vertical 4P 1 rear connection on adaptor 10

Packing Units

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	1.500 cm
Package 1 Width	35.000 cm
Package 1 Length	59.000 cm
Package 1 Weight	1.528 kg
Unit Type Of Package 2	S04
Number Of Units In Package 2	7
Package 2 Height	30.000 cm
Package 2 Width	40.000 cm
Package 2 Length	60.000 cm
Package 2 Weight	11.502 kg
Unit Type Of Package 3	P12
Number Of Units In Package 3	56
Package 3 Height	73.000 cm
Package 3 Width	80.000 cm

Package 3 Length	120.000 cm
-------------------------	------------

Package 3 Weight	102.000 kg
-------------------------	------------

Sustainability

Green Premium™ label is Schneider Electric's commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

[Learn more about Green Premium >](#)

[Guide to assess a product's sustainability >](#)



Transparency RoHS/REACH

Well-being performance

Reach Free Of Svhc

Toxic Heavy Metal Free

Mercury Free

Rohs Exemption Information Yes

Certifications & Standards

Reach Regulation

[REACH Declaration](#)

Eu Rohs Directive

Pro-active compliance (Product out of EU RoHS legal scope)

[EU RoHS Declaration](#)

China Rohs Regulation

[China RoHS declaration](#)

Pro-active China RoHS declaration (out of China RoHS legal scope)


Environmental Disclosure

[Product Environmental Profile](#)

Circularity Profile

No need of specific recycling operations

Dimensions

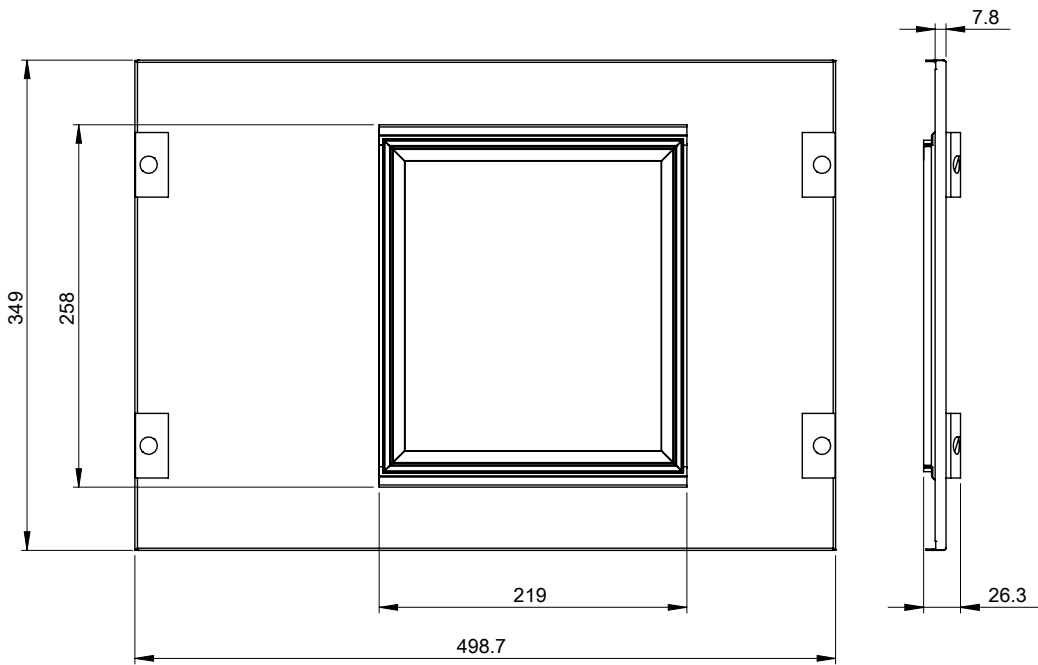

- All dimensions are approximate and are in mm.
- Also see technical documentation.